

## Detecting Node Collapse in Mobile Wireless Networks: An Investigative Model

**Kondragunta Rama Krishnaiah**, Professor, Department of Computer Science and Engineering, R K College of Engineering, Vijayawada - 521456, Andhra Pradesh, India, email: [kondraguntark@gmail.com](mailto:kondraguntark@gmail.com)

**Alahari Hanumant Prasad**, Professor, Department of Computer Science and Engineering, R K College of Engineering, Vijayawada - 521456, Andhra Pradesh, India, email: [hanuma.alahari@gmail.com](mailto:hanuma.alahari@gmail.com)

---

### ABSTRACT

Detecting node failures in mobile wireless networks poses significant challenges due to the dynamic nature of the network topology, intermittent connectivity, and limited resources. In our research, we address this issue by adopting a probabilistic approach and proposing two innovative node failure detection schemes. These schemes intelligently combine localized monitoring, location estimation, and node collaboration. Our extensive simulations encompass both connected and disconnected networks, demonstrating the effectiveness of our schemes. They achieve remarkably high failure detection rates, nearing the upper bounds, while keeping false positive rates low and minimizing communication overhead. Compared to conventional methods that rely on centralized monitoring, our approach presents a substantial advantage. We achieve communication overhead reductions of up to 80 percent, with only marginal decreases in detection rates and slightly higher false positive rates. Furthermore, our approach caters to both connected and disconnected networks, whereas centralized monitoring is limited to connected networks. When compared to other localized monitoring techniques, our approach maintains similar failure detection rates while remarkably reducing communication overhead by up to 57 percent. Moreover, it significantly decreases false positive rates, with instances as low as 0.01 compared to 0.27 in certain settings. By combining localized monitoring, location estimation, and node collaboration in a probabilistic framework, our proposed schemes exhibit superior performance, making them promising solutions for efficient node failure detection in mobile wireless networks.

**Keywords:** Wireless networks, node failure, network topology, location monitoring, location estimation, node collaboration.

---

### 1. INTRODUCTION

Mobile wireless networks have been used for many mission critical applications, including search and rescue [17], environment monitoring [11], [20], disaster relief [25], and military operations [18]. Such mobile networks are typically formed in an ad-hoc manner, with either persistent or intermittent network connectivity. Nodes in such networks are vulnerable to failures due to battery drainage, hardware defects or a harsh environment. Detecting node failures is important for keeping tabs on the network. It is even more important when the mobile devices are carried by humans and are used as the main/only communication mechanism (see discussion in Section III). Node failure detection in mobile wireless networks is very challenging because the network topology can be highly dynamic due to node movements. Therefore, techniques that are designed for static networks are not applicable. Secondly, the network may not always be connected. Therefore, approaches that rely on network connectivity have limited applicability. Thirdly, the limited resources (computation, communication and battery life) demand that node failure detection must be performed in a resource conserving

manner. One approach adopted by many existing studies is based on centralized monitoring. It requires that each node send periodic “heartbeat” messages to a central monitor, which uses the lack of heartbeat messages from a node (after a certain timeout) as an indicator of node failure [5], [12], [19]. This approach assumes that there always exists a path from a node to the central monitor, and hence is only applicable to networks with persistent connectivity. In addition, since a node can be multiple hops away from the central monitor, this approach can lead to a large amount of network-wide traffic, in conflict with the constrained resources in mobile wireless networks. Another approach is based on localized monitoring, where nodes broadcast heartbeat messages to their one-hop neighbors and nodes in a neighborhood monitor each other through heartbeat messages. Localized monitoring only generates localized traffic and has been used successfully for node failure detection in static networks [15]. However, when being applied to mobile networks, this approach suffers from inherent ambiguities—when a node A stops hearing heartbeat messages from another node B, A cannot conclude that B has failed because the lack of heartbeat messages might be caused by node B having moved out of range instead of node failure. In this paper, we propose a novel probabilistic approach that judiciously combines localized monitoring, location estimation and node collaboration to detect node failures in mobile wireless networks. Specifically, we propose two schemes. In the first scheme, when a node A cannot hear from a neighboring node B, it uses its own information about B and binary feedback from its neighbors to decide whether B has failed or not. In the second scheme, A gathers information from its neighbors, and uses the information jointly to make the decision (see Section V for details). The first scheme incurs lower communication overhead than the second scheme. On the other hand, the second scheme fully utilizes information from the neighbors and can achieve better performance in failure detection and false positive rates. We have evaluated our schemes using extensive simulation in both connected and disconnected networks (i.e., networks that lack contemporaneous end-to-end paths). Simulation results demonstrate that both schemes achieve high failure detection rates, low false positive rates, and incur low centralized monitoring, while our approach may have slightly lower detection rates and slightly higher false positive rates, it has significantly lower communication overhead (up to 80% lower). In addition, our approach has the advantage that it is applicable to both connected and disconnected networks. Compared to other approaches that use localized monitoring, our approach has similar failure detection rates, lower communication overhead (up to 57% lower) and much lower false positive rate (e.g., 0.01 versus 0.27 in some setting).

## EXISTING SYSTEM

Mobile wireless networks have been used for many mission critical applications, including search and rescue, environment monitoring, disaster relief, and military operations. Such mobile networks are typically formed in an ad-hoc manner, with either persistent or intermittent network connectivity. Nodes in such networks are vulnerable to failures due to battery drainage, hardware defects or a harsh environment. Detecting node failures is important for keeping tabs on the network. It is even more important when the mobile devices are carried by humans and are used as the main/only communication mechanism.

### Disadvantages of Existing System:

1. Node failure detection in mobile wireless networks is very challenging because the network topology can be highly dynamic due to node movements. Therefore, techniques that are designed for static networks are not applicable.
2. The network may not always be connected. Therefore, approaches that rely on network connectivity have limited applicability.

3. The limited resources (computation, communication and battery life) demand that node failure detection must be performed in a resource conserving manner.



**PROPOSED SYSTEM**

In this paper, we propose a novel probabilistic approach that judiciously combines localized monitoring, location estimation and node collaboration to detect node failures in mobile wireless networks. Specifically, we propose two schemes. In the first scheme, when a node A cannot hear from a neighboring node B, it uses its own information about B and binary feedback from its neighbors to decide whether B has failed or not. In the second scheme, A gathers information from its neighbors, and uses the information jointly to make the decision.

**Advantages of Proposed System:**

1. Our approach has the advantage that it is applicable to both connected and disconnected networks.
2. Our schemes achieve high failure detection rates, low false positive rates, and low communication overhead.


**SYSTEM ARCHITECTURE**

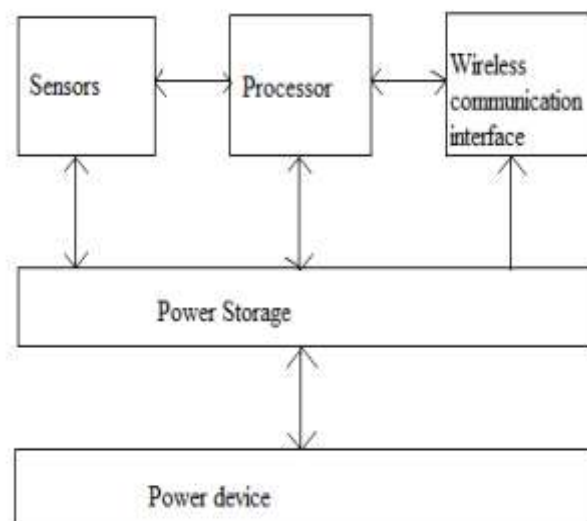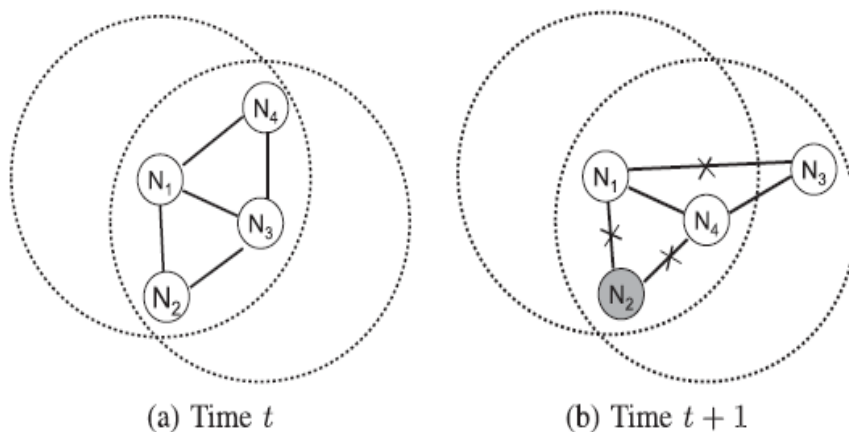

Our network model is designed to work with a collection of low-power radio frequency (RF) transceivers that move relative to each other across diverse terrains affected by RF propagation impairments. By employing low transmitter power, we establish radio coverage that limits interception probability and the number of neighboring devices while maximizing frequency reuse. Due to the combination of low power and the challenging propagation environment, our network experiences stochastic link failures. To address this issue, we propose a pioneering approach called "Link Scanner" (LS) that allows real-time monitoring of wireless links. LS functions by sending a single probe message throughout the network and collecting hop counts of received probe messages at sensor nodes. By observing the differences between the received hop counts and the expected network topology, we can deduce the status of all links using a probabilistic model. In this paper, our focus is on detecting node replication attacks, and we begin by analyzing the essential characteristics of a distributed mechanism. Subsequently, we present solutions to the problem and introduce a self-healing RED (Randomized, Efficient, and Distributed) protocol specifically designed for detecting node replication attacks. Our research demonstrates that the proposed RED protocol fulfills the desired requirements for this task. Additionally, we highlight the impressive efficiency of our protocol in terms of memory, communication, and computation.

#### Advantages of Proposed System:

- We propose a novel and low-cost link scanning scheme LS for faulty link detection. LS infers all links statuses on the basis of data collection from a prior probe flooding process in which we leverage hop count to reflect node in (or) out-going link performances.
- A distributed mechanism and shown the solution and later for detection of node replication attacks, to detect node replication attacks, a self healing, efficient, and distributed protocol are proposed.
- We are investigating the efficiency and performance characteristics of survivable and adaptive network protocols with computer simulation techniques. Preliminary results will be reported on the evaluation of the algorithm in terms of message delay and acknowledgment overhead for different network sizes and routing restrictions.

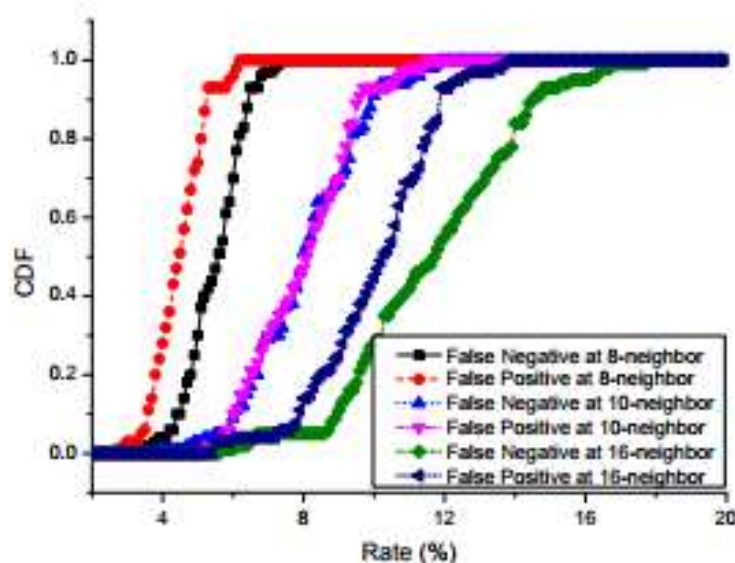

**Impact of network density:** Network density can also significantly change the network topology. What is more, a dense network should suffer more channel collision and packet lost due to hidden

terminal, thus may impact the probe flooding process and cover the real link performance. Here we define a network density in terms of average neighbor number. We show three densities in a 60-node network. Clearly, when the network is sparse LS can achieve a false negative rate about 5%, which means there is only one out of 20 normal links reported by LS is faulty in fact, while the false positive rate is only 4.8%. Following the network density increases, each node is expected to receive more probes with the same hop count number, since its neighbors are more centralized around itself. In DLV its corresponding group has a larger size, hence produces more possibilities once the number of probes mismatches the group size.

## CONCLUSION AND FUTURE WORK

In this paper, we presented a probabilistic approach and designed two node failure detection schemes that combine localized monitoring, location estimation and node collaboration for mobile wireless networks. Extensive simulation results demonstrate that our schemes achieve high failure detection rates, low false positive rates, and low communication overhead. We further demonstrated the tradeoffs of the binary and non-binary feedback schemes. As future work, we plan to evaluate our schemes using real world mobility traces and in scenarios with irregular transmission ranges. Our approach relies on location estimation and the usage of heartbeat messages for nodes to monitor each other. Therefore, it does not work when location information is not available or there is communication blackouts (e.g., due to weather conditions). Developing effective approaches for those scenarios is left as future work.

## REFERENCES

- [1] ns-3. <https://www.nsnam.org/>.
- [2] R. Badonnel, R. State, and O. Festor. Self-configurable fault monitoring in ad-hoc networks. *Ad Hoc Networks*, 6(3):458–473, May 2008.
- [3] P. Bahl and V. N. Padmanabhan. RADAR: An in-building RF-based user location and tracking system. In *Proc. of IEEE INFOCOM*, 2000.
- [4] Y. Bar-Shalom, T. Kirubarajan, and X.-R. Li. *Estimation with Applications to Tracking and Navigation*. John Wiley & Sons, Inc., 2002.
- [5] D. Ben Khedher, R. Glitho, and R. Dssouli. A Novel Overlay-Based Failure Detection Architecture for MANET Applications. In *IEEE International Conference on Networks*, pages 130–135, 2007.
- [6] C. Bettstetter. Smooth is Better than Sharp: A Random Mobility Model for Simulation of Wireless Networks. In *Proc. of ACM International Workshop on Modeling, Analysis and Simulation of Wireless and Mobile Systems*, pages 19–27, New York, NY, USA, 2001. ACM.
- [7] C. Bettstetter. Topology Properties of Ad Hoc Networks with Random Waypoint Mobility. *ACM SIGMOBILE Mobile Computing and Communications Review*, 7(3):50–52, 2003.
- [8] J. Broch, D. A. Maltz, D. B. Johnson, Y.-C. Hu, and J. Jetcheva. A Performance Comparison of Multi-Hop Wireless Ad hoc Network Routing Protocols. In *Proc. of MobiCom*, pages 85–97, New York, NY, USA, 1998. ACM.
- [9] T. D. Chandra and S. Toueg. Unreliable Failure Detectors for Reliable Distributed Systems. *Journal of the ACM*, 43:225–267, 1996.

- [10] I. Constandache, R. R. Choudhury, and I. Rhee. Towards Mobile Phone, Localization without War-Driving. In Proc. of IEEE INFOCOM, March 2010.
- [11] K. Dantu, M. H. Rahimi, H. Shah, S. Babel, A. Dhariwal, and G. S. Sukhatme. Robomote: enabling mobility in sensor networks. In Proc. of IEEE/ACM IPSN, 2005.
- [12] M. Elhadef and A. Boukerche. A Failure Detection Service for Large-Scale Dependable Wireless Ad-Hoc and Sensor Networks. In International Conference on Availability, Reliability and Security, pages 182–189, 2007.
- [13] K. Fall. A delay-tolerant network architecture for challenged internets. In Proc. of ACM SIGCOMM, pages 27–34. ACM, 2003.
- [14] I. Gupta, T. D. Chandra, and G. S. Goldszmidt. On Scalable and Efficient Distributed Failure Detectors. In Proc. of ACM symposium on Principles of distributed computing (PODC), pages 170–179, 2001.
- [15] C.-F. Hsin and M. Liu. A Distributed Monitoring Mechanism for Wireless Sensor Networks. In Proc. of ACM WiSe, December 2002.
- [16] L. Hu and D. Evans. Localization for Mobile Sensor Networks. In Proc. of ACM MobiCom, 2004.
- [17] J.-H. Huang, S. Amjad, and S. Mishra. CenWits: a Sensor-based Loosely Coupled Search and Rescue System using Witnesses. In Proc. of ACM SenSys, 2005.
- [18] J. Jubin and J. Tornow. The DARPA Packet Radio Network Protocols. Proceedings of the IEEE, 75(1):21–32, January 1987.
- [19] D. Liu and J. Payton. Adaptive Fault Detection Approaches for Dynamic Mobile Networks. In IEEE Consumer Communications and Networking Conference (CCNC), pages 735–739, 2011.
- [20] M. B. McMickell, B. Goodwine, and L. A. Montestruque. Micabot: A robotic platform for large-scale distributed robotics. In Proc. of IEEE International Conference on Robotics and Automation (ICRA), 2003.
- [21] M. Natu and A. Sethi. Adaptive Fault Localization for Mobile, Ad- Hoc Battlefield Networks. In Proc. of IEEE Milcom, Atlantic City, NJ, October 2005.
- [22] I. Rhee, M. Shin, S. Hong, K. Lee, S. J. Kim, and S. Chong. On the Levy-Walk Nature of Human Mobility. IEEE/ACM Transactions on Networking (TON), 19(3):630–643, 2011.
- [23] S. Rice. Mathematical Analysis of Random Noise. Bell Telephone Laboratories, 1944.
- [24] N. Sridhar. Decentralized Local Failure Detection in Dynamic Distributed Systems. In IEEE Symposium on Reliable Distributed Systems (SRDS), pages 143–154, 2006.
- [25] Y. Yi, M. Gerla, and K. Obraczka. Scalable Team Multicast in Wireless Ad Hoc Networks Exploiting Coordinated Motion. Ad Hoc Networks, 2(2):171–184, 2004.
- [26] J. Yoon, M. Liu, and B. Noble. Random Waypoint Considered Harmful. In Proc. of IEEE INFOCOM, volume 2, pages 1312–1321, 2003.