

Implementation of Rfid in Inventoy Management

Rajkumar Sharma^a, Piyush Singhal^b

^a Department of Mechanical Engineering, GLA University, Mathura 281406, India.

^bDepartment of Mechanical Engineering, GLA University, Mathura 281406, India.

Article History: : Received: 10 January 2021; Revised: 12 February 2021; Accepted: 27 March 2021; Published online: 20 April 2021

Abstract: Radio frequency detection has been one of the most developed and anticipated technologies in recent years. RFID is an automated framework for identification that uses RFID tags or navigation systems for remote storage and retrieval of data. RFID is perhaps the most exponentially evolved supply chain management technology. They are also used to integrate different processes that are part of daily operations and to optimize transport of goods across the production process. RFID facilitates real-time tracking of production, inventory prices and demand. On the other hand, the RFID solution is actually costly, unstandardized; manufacturers who undertake sequential projects are less in number and are dissatisfied with privacy concerns. This article explores the benefit and drawbacks of these labels in inventory management.

Keywords: RFID tag, SCM, Costly solution, Real-time visibility

1. Introduction

The key to recovery never ends. Supply chain instability was raised by [1–6]. Quality assurance of SCM has been a focus for many enterprises for some time now and has led to major cost savings [1]. SCM is "the logistics management and monitoring of all goods and information from acquisition of raw materials to delivery to end users" Industry rivalry promotes competition for new automated vehicles that facilitates improvements in the SCM that lead to RFID growth [2-7].

In a new era of cost reduction, RFID is aimed at revolutionizing the supply chains [8]. FID provides constant, real-time information with less human intervention, making it easier to gather and process knowledge more frequently. Although RFID is more powerful than its predecessor, it is still access at a price which is still prohibitive for some companies [9-14]. RFID remains unstandardized, has only a small number of suppliers which build up final installations, faces some detrimental challenges in the development and is clouded by privacy issues.

2. Evolution Of Rfid

Busch et al (2003) provides a description of the supply chain management operating activities. Their appearance from the early 1960s discusses the progress of planning processes in conjunction with the Content Specification Planning (MRP) paradigm [15-18]. They also discuss current principles and roles of (APS) implementations and apply them to integrated supply chain management frameworks [19-23]. The growth of supply chains and the logical Advanced Preparation and Planning (APS) process and cooperation on the beneficial impacts of "bullwhip effect" information on the supply chain are also explained in Groan (2004) [24, 25]. Visibility of information is important to the success of the supply chain process and can help to mitigate the effect of torrential material.

Originally, automatic data entry and descriptions of goods moving through the supply chain were used [26]. Educated manual key entry operators are less optimistic and much slower around 1 error per 300 characters. AIDC-based recognition systems are much more effective and less expensive than non-automatic ones. The most common AIDC technology is bar code, which requires optical scanner to read the labels [27].

Barcodes are much better than common marks, since it is no longer anticipated that the staff can decode or insert the specifics of each mark manually; they must explicitly scan for the mark (Zebra Technology). Bar Coding Fundamentals, 2002.) Singer (2003) notes that, while the rating of bar code is almost ideal, this technique uses a single display line to scan a bar code, allowing any object to be changed one by one.

This can also lead to human error, as bar codes are often manually checked. Ordinary barcodes store a little of static information, usually around 20 characters. (From Hont, S. (Official Date). If the barcode is written, the information found in RFID systems and RFID development and distribution applications cannot be changed, upgraded or reprogrammed, since the material would be transportable through the supply chain (Sangani, K. 2004. RFID Sees everything.

RFID scanners can submit tags and simultaneously search for several items in milliseconds. This feature allows for the automation of different SCM work-intensive tasks, including the monitoring and analysis of incoming stocks. RFID networks can improve flows in the supply chain. According to Heinrich (2005), Sarma (2002) describes RFID technologies in the supply chain process. Davenport and Brooks (2004) state that the use of RFID technology across supply chains is currently hampered by two factors are as follow:

Cost comparison with bar codes

The incompatibility of the RFID process.

3. PRINCIPLE OF RFID

Radio frequency recognition is a generic phrase for devices that use radio waves to identify individuals or topics. A main RFID unit contains a microchip, an antenna, and an electromagnetic sticker, also known as a transponder. The sender transmits out electromagnetic waves receiving antennas. The user transfers the data via the sending of radio waves back to the reader which is typically a serial number registered on the user. The reader transforms radio waves into digital content, which can be sent to computers for use, from the RFID tag. The specifications of the tag are a making a good serial electronic commodity code. It is similar to the Standard Commodity Code in the bar-code scheme and gives a unique ID for products.

3.1 RFID Tag

In RFID tags there's many two main components: chip and an antenna, barcode QR code Scanned by the scanner. The chips and antennas are positioned to construct an inlay in Figure 1, and then the inlay is incorporated to form a finished label or mark in material.

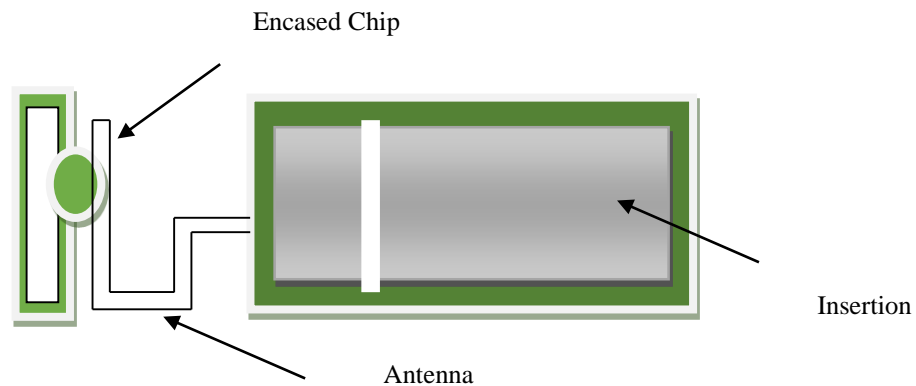


Figure 1: Inlay – Radio Frequency Elements

3.2 Classification

RFID Tags can be passive, active, or semi-passive and read only or read write.

RFID tags come in three general varieties: passive, active, or semi-passive.

3.2.1 Passive RFID Tags

For passive RFID identifiers, no internal power supply is needed. The minute electricity generated by the radio frequency signal input into the antenna provides enough power to respond to the integrated CMOS circuit in the tag. Many passive tags backscatter the carrier wave from the reader. The response to passive RFID tags is usually restricted due to power and costs problems, normally just an identification number. Passive tags can vary in practical read size from 10 cm to a few meters.

3.2.2 Effective Tags For RFID

In comparison to passive RFID tags, active RFID tags have a power source that is utilized to drive electronic components and to transmit that response signal. Active tags often can transfer power at rates higher than passive tags because of their on-board supply of power that enables them with moisture and spray targets or damping targets to have stronger mirror goals from the metal (shipment container, car) etc. in a "RF threatened" environment. The active marks are typically higher due to battery quantity and higher production costs depending on battery efficiency. Many successful tags also have hundreds of meters of contract life and battery life up to 10 years.

3.2.3 Partial Tag For RFID

Partially tags RF energy is the same as active tags because its own power supply is available, but the battery just controls the microchip and refuses to send signal. Normally, the response is powered by the text dispersion, where energy is expressed back to the consumer as with passive tags. The power data management unit is also a battery programme. 1) Increased aesthetics than passive tags 2) Longer life cycle powered batteries than active tags Half-passive tags have three primary benefits. 3) Can carry out active tasks on its own (e.g., temperature logging), although no circuit support reader is necessary.

3.2.4 Read or Read-write

RFID tags for microchips can be read-only or read-only. If read-write tags are beyond the reader or questioner's control, you can either use tags for information or write details. Data are kept in all read-only microchips throughout the development process. You will never change the specifics of these units. A serial number cannot be overwritten later on will mark several tags. Frequencies of RFID systems which be listed as shown in the table below. (Data, 2005; Finkenzeller, 2003). Wikipedia, 2005.

Table 1: Active RFID Frequency and Accessible Gap

Types of Tag	Frequency	Readable Distance
Low frequency	13 to 135 KHz	Up to 10 inches
High frequency	13.57 MHz	Up to 1 meter.
UHF	878 to 986 MHz	Up to 10 meters
Microwave	Above 1Ghz	Above 10 meters

4. ADVANTAGES

4.1.1 Consequences of Semi View Technology

Non-line-of-view scanning automated: In comparison to barcodes, this means that objects do not require a different scanning orientation. RFID scanners can communicate with tags in milliseconds and simultaneously search for several items.

4.1.2 Labor Reduction

RFID plans to automate the supply chain at unprecedented levels that lead to job losses in the supply chain. Reducing human contact ensures a safe, versatile and transparent supply chain for companies at all rates.

4.1.3 Visibility Enhancement

RFID helps to control products in the supply chain in real time, providing accurate and detailed information about all things, and allows businesses to use this knowledge to improve their efficiency. They will continuously accumulate and change their information as artifacts move through the supply chain. Enhanced access to inventories can be added to maximize the ability at the right time to place the right product, such as a faster response to customer demands and improvements to the industry.

4.1.4 Property Tracking

At present, asset monitoring is one of the most common implementations of RFID technologies. A recent survey by the Aberdeen Group of 200 companies found that more than half of RFID companies used asset surveillance technologies. RFID is ideal for the identification of items that need routine inspection, testing or review. RFID regulates the move, use, and position of an object, and can further increase the use of an object. RFID will assist shipping and logistics companies in the efficient management of these essential products.

4.2 Inventory Management

For effective inventory management, the selection, incorporation and analysis of data from different locations such as distribution center and warehouses is crucial. Conventional monitoring systems require complex, time-consuming and error-prone handling. The use of RFID technology has significant benefits in comparison to conventional methods.

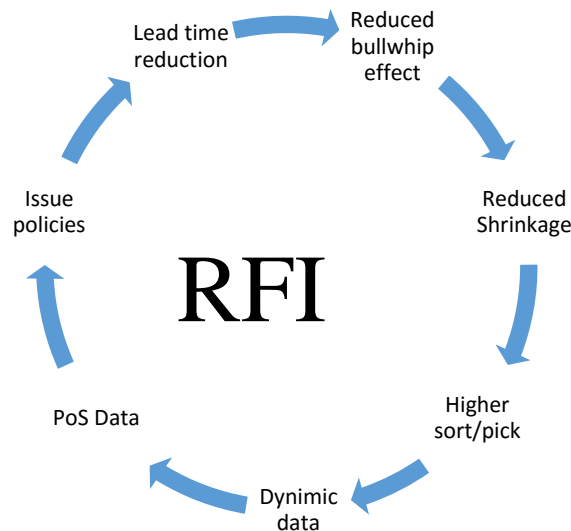


Fig 2. RFID for Inventory Control

4.3 Assets Visibility - Smart Shelves:

The allowed software will place an automatic order in a refill-based programmed if the accumulated stock in a warehouse or a fulfillment center falls below a certain level. Effective time details can be obtained through 'smart shelves' which integrate the RFID tag recipients.

4.4 POS Data

In the retail sector, RFID (POS) technologies may be used to track market trends or construct a probabilistic demand model. This may be useful for products with deep dynamic patterns.

4.5 Reduction in Bullwhip Impact

Accurate data on actual sales could not be obtained; this increases the size and complexity of the bull wing effect due to tracking limits on conventional systems. Detailed, real-time delivery information can be obtained and used while decision-making using RFID devices. It also helps to reduce the accumulated effect of bullfights.

4.5.1 Lead Time Reduction

Conventional technologies limit the identification of entities during transport. RFID Systems offers maximum visibility of product movement in the supply chain. This will help to determine early on inventory management when development is delayed. The time and energy required for loading/unloading of goods is removed partially or completely. This reduces the total time needed for an order to arrive.

4.5.2 Sort/Pick Improvement

Sort/pick in a warehouse takes time and is vulnerable to errors. RFID systems find it simple to scan and pick, because precise and real-time information is gathered in the host machine database without physical activity.

4.5.3 Inventory Reduction

Since products are monitored continuously, the shrinkage and robbery of products can be stopped using RFID technologies. Robbery is forbidden.

4.5.4 Vulnerable Inventory Regulation

A perishable object has reduced usable life and can degrade and reduce its useful life if not properly handled during transportation. If this shortened information is not updated, an expired item may be submitted to a customer. Under these circumstances, the removal of the item and the consumer's lack of trust may be an unnecessary cost. The use of RFID technologies to identify the material and concurrently move through the supply chain will mitigate this spoilage.

4.5.5 Policy drafting

RFID systems have the exact count and location of items. It will help to comply with the product compliance requirements. For example, First-in-First-Out (FIFO) policies for blood banks include milk, fruit and the last-in-first-out (LIFO).

4.6 Commodity Reminder

The costly cause of failures in the supply chain, connected to drug reminders, is also that it is extremely difficult for businesses "to find the individual faulty instances of a product" or "to lose perfectly good commodities. The Electronic Product code (EPC and RFID) helps marketers to acquire information immediately in order to allow selective reminder of only the products in question for each product in the supply chain, on a clearly identifiable basis.

4.7 Preventive Intervention Counterfeiting

Network of EPC the impact of counterfeiting can also be minimized and reduced by RFID tags. Smart RFID tags, identified electronically when packaging is broken, often provide safe handle protection.

4.5 Safety RFID Technologies may result in the defense of all levels of SCM because they are to prevent general theft in retail stores or a decrease in stock in the center of the supply chain. The RFID's 'always on' and insightful nature may make a significant contribution to this ability. Moreover, RFID tags are suitable for authentication applications "virtually impossible to clone."

4.8 Quality Control

RFID allows companies not only to track the quality of products across the procurement cycle but also to move through the supply chain as a product. The system allows real-time transmission of quality assurance data for manufacturing purposes, minimizes the probability that customers obtain lower-level products and the time necessary to track and process orders.

4.9 GPS Systems Integrated Supply Chain Monitoring

The GPS network-GPS Geographical Information System (GIS) can be combined into a single square meter with GPS latitude and longitude mapping co-ordinates to define satellite positioning connectivity. GIS refers both to GPS coordinates and to layers of information, including buildings and roads, territories (etc.), which go beyond conventional road maps. GIS applies on land maps. For purposes of tracking schemes that involve integration of the GPS and GIS technologies in the market environments, RFID provides detailed information for individual goods (or packets) that must be traced through aggregate points on a supply chain. RFID provides the granular information needed for complete visibility of the supply chain. Navigation system and Geographic information systems provide surveillance, visualization and transparency tools and including RFID that allow the location of level of product or shipment monitoring inside warehouse, tracking of the supply chain along the specific awareness of the production process.

5. DRAWBACKS

5.1 Software Charges

RFID development is still expensive, and the cost of RFID system has fast also been major obstacle to their prevalent use in SCM. Reports on the costs of the new RFID tags differ, but both accept that the tags are too large to justify the labelling of all products. Current cost estimates for the passive tag range from 15 cents to 75 cents, including significant effects on final costs on the amount of tags purchased.

5.2 Producers and Retailers Co-ordination

Only a serial number was used in RFID tags using the EPC format. This knowledge will then be included in the libraries that link these serial numbers with more details. "Technologies are major barriers to data synchronization, integration, transformation and communication." Previous attempts to partner with NGOs have struggled because knowledge cannot be "ready collected and exchanged."

5.3 Loss of Quality

Although RFID technology has existed for decades, it has only recently been promoted to SCM. As a result, the implementation and maintenance of technologies for the general use of distribution chains is evidently hindered by a lack of requirements. However, the International Organization for Standardization (ISO) has also not accepted the global standard of the EPC. The two partners, who represent the needs of all customers, still have no consistency to support.

Another confusing issue is the distribution of electromagnetic frequencies. Radio spectrum is a scarce resource, and while some organizations, largely controlled by individual governments, seek to maintain effective spectrum control. Telephone, telephone, radio and TV networks, as well as a number of other facilities, use a wireless network. The range of network that RFID needs the allocation of radio spectrum only complicates the question of market standardization and is likely to be one of the main obstacles to universal RFID requirements.

5.4 Reading and Interference

RFID is able to transmit direct and accurate information to RFID readers due to the use of the radio spectrum to transmit signals. Likewise, the radio frequency is limited by the inherent limitations of RFID coverage.

Placing tags on different items at the most efficient read speed is one of the most challenging issues related to RFID. Readers can only read tags that face a certain direction, so that items have to be packed as needed. The RFID kryptonite, which can be havoc with RFID signals, has been identified in metal and liquid. Metal close to the tag or reader reduces the "electromagnetic coupling needed for the transmission of energy to the device" which reduces the range of the system.

5.5 Privacy Concerns

Trust problems are one of the main challenges to RFID's unreserved growth. The new RFID protocols are structured to provide the maximum results between the administrator and the server. Data privacy activists are concerned that if RFID tags are put on specific products, it could be likely that the commodity may be monitored as bought by customers. Safety issues by making sure the tags can be removed until bought.

6. Conclusion

As an innovative industry, RFID is appropriately expressed as improving processes, by efficiency and increased visibility and integration of the supply chain. Organizations shall integrate RFID into their supply chain in order to satisfy the specifications from either the law or the return on garments. This period will be strengthened with the inclusion of criteria for RFID, such as the EPC. In addition, the cost of RFID is associated with the technological standard of application, which will increase its usage rate across the supply chain as RFID costs decrease.

References

1. R. Sharma, P. Singhal, Demand forecasting of engine oil for automotive and industrial lubricant manufacturing company using neural network, 2019. www.sciencedirect.com.
3. R. Sharma, P. Singhal, Implementation of fuzzy technique in the prediction of sample demands for industrial lubricants, *Int. J. Innov. Technol. Explor. Eng.* 8 (2019).
5. R. Sharma, D.K. Pathak, V.K. Dwivedi, Modeling & Simulation of Spring Mass Damper System in Simulink Environment, IIT Roorkee. (n.d.) 205–210.
7. R. Sharma, P. Singhal, An Optimal Treatment to Supply Chain Disruptions Using Model Predictive Control, IIT Roorkee. (n.d.) 103–109.
9. V. Kumar, R. Sharma, P. Singhal, Demand Forecasting of Dairy Products for Amul Warehouses using Neural Network, *Int. J. Sci. Res.* (2019). www.winkipedia.com.
11. S. Garg, R. Sharma, P. Singhal, Forecasting of Demand for Small Medium Enterprises Using Fuzzy Logic, *Int. J. Sci. Res.* (2019). www.ijsr.net.
13. L. McCathie, The advantages and disadvantages of bar codes and radio frequency identification in supply chain management, 2004.
15. Roman Christian Rochel, REID Technology Introduction and Impacts on Supply Chain management Systems, 2007.
17. A Kumar, K Sharma, AR Dixit A review of the mechanical and thermal properties of graphene and its hybrid polymer nanocomposites for structural applications, *Journal of materials science* 54 (8), 5992-6026.
18. K Sharma, M Shukla, Three-phase carbon fiber amine functionalized carbon nanotubes epoxy composite: processing, characterisation, and multiscale modeling, *Journal of Nanomaterials* 2014
19. K Sharma, KS Kaushalyayan, M Shukla, Pull-out simulations of interfacial properties of amine functionalized multi-walled carbon nanotube epoxy composites, *Computational Materials Science* 99, 232-241
20. A Yadav, A Kumar, PK Singh, K Sharma, Glass transition temperature of functionalized graphene epoxy composites using molecular dynamics simulation, *Integrated Ferroelectrics* 186 (1), 106-114
21. PK Singh, K Sharma, A Kumar, M Shukla, Effects of functionalization on the mechanical properties of multiwalled carbon nanotubes: A molecular dynamics approach, *Journal of Composite Materials* 51 (5), 671-680
22. PK Singh, K Sharma, Mechanical and Viscoelastic Properties of In-situ Amine Functionalized Multiple Layer Grpahene/epoxy Nanocomposites, *Current Nanoscience* 14 (3), 252-262
23. Singh PK, & Sharma K, Molecular Dynamics Simulation of Glass Transition Behaviour of Polymer based Nanocomposites, *Journal of Scientific & Industrial Research*, 77 (10) (2018) 592-595.
24. Tom Karygiannis, Bernard Eydt, Greg Barber, Lynn Bunn, Ted Phillips, Guidelines for Securing Radio Frequency Identification (RFID) Systems, Special Publication 800-98, April 2007.
25. Finkenzeller, K. 2001. RFID Handbook: radio-frequency identification fundamentals and Applications, John Wiley & Son, New York.
26. A Kumar, K Sharma, AR Dixit, Carbon nanotube-and graphene-reinforced multiphase polymeric composites: review on their properties and applications, *Journal of Materials Science*, 1-43

27. MK Shukla, K Sharma, Effect of carbon nanofillers on the mechanical and interfacial properties of epoxy based nanocomposites: A review, *Polymer Science, Series A* 61 (4), 439-460
28. A Kumar, K Sharma, AR Dixit, A review on the mechanical and thermal properties of graphene and graphene-based polymer nanocomposites: understanding of modelling and MD simulation, *Molecular Simulation* 46 (2), 136-154
29. K Mausam, K Sharma, G Bharadwaj, RP Singh, Multi-objective optimization design of die-sinking electric discharge machine (EDM) machining parameter for CNT-reinforced carbon fibre nanocomposite using grey relational analysis, *Journal of the Brazilian Society of Mechanical Sciences and Engineering* 41 ...
30. Singer, T. 2003. *Understanding RFID - A Practical Guide for Supply Chain Professionals.*, Tompkins Associates., 2003.
31. Angeles, R. (2005). RFID technologies: Supply chain applications and implementation issues. *Information Systems Management*, 22 (1), pp.51-65.
32. MK Shukla, K Sharma, Improvement in mechanical and thermal properties of epoxy hybrid composites by functionalized graphene and carbon-nanotubes, *Materials Research Express* 6 (12), 125323
33. K Kumar, K Sharma, S Verma, N Upadhyay, Experimental Investigation of Graphene-Paraffin Wax Nanocomposites for Thermal Energy Storage, *Materials Today: Proceedings* 18, 5158-5163
34. Goyal, M. and B. Gupta, Analysis of shape, size and structure dependent thermodynamic properties of nanowires. *High Temperatures--High Pressures*, 2019. 48.
35. Goyal, M. and M. Singh, Size and shape dependence of optical properties of nanostructures. *Applied Physics A*, 2020. 126(3): p. 1-8.
36. Heinrich, C.E.). RFID-growing your business through real world awareness. *Logistics & Transport Focus*, (2005) 7 (5), 25-27.
37. Kopalchick III, J., & Monk, C. (2005) REID risk management Internal Auditor, 62 (2), 66-72.
38. Goyal, M., Shape, size and phonon scattering effect on the thermal conductivity of nanostructures. *Pramana*, 2018. 91(6): p. 87.
39. Goyal, M. and B. Gupta, Study of shape, size and temperature-dependent elastic properties of nanomaterials. *Modern Physics Letters B*, 2019. 33(26): p. 1950310.
40. S. Garfinkel, Ed., and B. Rosenberg, Ed., *RFID Applications, Security, and Privacy*. Upper Saddle River, New Jersey: Pearson Education, Inc., 2006.
41. Lahiri, *RFID Sourcebook*. Pearson Education, 2005.