

Design and Characterization Analysis of Microstrip Patch Array Antenna with Dumbell shaped DGS for ISM Band Applications

Sujit Dharmpatre^{*1}, and Mukul Sutaone²

¹Research Scholar, Department of Electronics and Telecommunication Engineering, College of Engineering, Pune (COEP), Pune, Maharashtra, India.

²Professor, Department of Electronics and Telecommunication Engineering, College of Engineering, Pune (COEP), Pune, Maharashtra, India.

Article History: Received: 10 January 2021; Revised: 12 February 2021; Accepted: 27 March 2021; Published online: 20 April 2021

Abstract: To detect the malignant cancerous issues in the breast, various techniques are used. These are Mammography, MRI, and Ultrasound etc. These technologies are miserable during examining. The Microwave Breast Imaging technique generates scattered signals and it detects abnormal tissues after transmission and reception of Microwave signals. Therefore, 1X4 array antenna is designed. It detects the tumor at early stage. This array antenna is more specific to detect the malignant issues. The array antenna has 1X4 arrays, with Defected Ground Structure (DGS). It will increase efficiency of this model. This model is used in ISM (Industrial, Scientific, and Medical). It is designed for center frequency 2.4GHz. The input return loss should be greater than 10. FR4 is used as Substrate. Theoretical modeling and simulation by HFSS Software is done to optimize antenna parameters. Three antennas namely Microstrip patch antenna, 1 x 4 MSP array antenna and 1 x 4 MSP array antenna with DGS are fabricated and the experimental results are verified in an anechoic chamber of millimeter wave and antenna lab. It is found that the experimental results match the simulated results. It is found that array and DGS enhances the antenna parameters like antenna gain, return loss, VSWR and bandwidth at 2.4GHz frequency for ISM band applications.

Keywords: Microstrip Antenna, Defected Ground Structure, ISMB and, Array Antenna, Microwave Breast Imaging Technique

1. Introduction

1.1. Microwave Breast Imaging Techniques

Due to Cancer, large number of human beings surrendered to death in the world. In Woman, Breast Cancer is the main health issue. Early detection will reduce the mortality rate (Çalışkan, R., 2015). The techniques available to detect the malicious tissues are X-ray mammography, MRI, Ultrasound, Microwave breast imaging technique. These techniques have some limitations. It cannot detect small lesions. X-rays penetrate ionizing radiations in the human body. MRI technique uses the magnet whereas Ultrasound techniques use emission and reception of sound waves. Both use ionized radiations. Thus, Microwave Breast imaging technique is used to overcome these drawbacks (Banu, S., 2013).

Microwave breast imaging technique uses the antennas to detect malicious tissues. The antennas are placed near the skin of human body (Shrestha, S., 2010). The microwaves are sent into human body and the malicious tissues are detected. The scattering signals are generated during the penetration of the microwave signals. These scattering signals are captured by receiving antennas and analyzed (Afyf, A., 2015). With signal analysis, position and the volume of tumor is detected. Malicious tissues can be found out if the water level of tissue is high or temperature of tissue is high. When microwave energy is absorbed by tissues then the size and conductivity of cancerous tissues gets increased. By receiving the scattered signal from tissues, the conclusion can be drawn that the tissues which have more scattering signals are cancerous tissues. Thus malicious tissues are detected. Microstrip Patch Antenna is used to correct the drawbacks of Microwave breast imaging technique (Nalam, M., 2014). Fig. 1.1 shows the amount of signal scattered by a malicious tissue (breast tumor) is greater than that of normal breast tissues. The scattered signals are analyzed and utilized for the tumor detection (Singh, P. K., 2013).

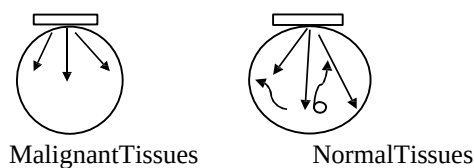


Fig.1.1–Scattering Signals in the tissues.

1.2 Microstrip Antenna Background

An antenna acts as a transducer that converts radio frequency electrical currents at waveguide into electromagnetic waves in space. It is an important design consideration in any communication system for providing extensive coverage of the newest wireless applications in various fields. Many applications have different requirements for an antenna and its parameters. Conventional antennas that are used in wireless

communication systems are large in size and weight. Therefore, the size of the complete transceiver module is large.

In modern communication systems, researchers are looking for antennas that are smaller in size (Ghaloua, A 2017) and weight; consequently, the transceiver size and weight will be reduced. Therefore, the microstrip patch antenna is the one that can fulfill the requirement of the smaller in size, lighter in weight and lower cost solution. Hence, by using this antenna the size and weight of the wireless communication system will be small. So, there are different types of patch antennas which are used in wireless communication systems such as microstrip patch antenna (Jia, L. L., 2005), microstrip slot (Gautam, A. K., 2015) or travelling antenna and printed dipole antenna.

In this paper, the MSPA is proposed for wireless communication applications. To enhance the gain, array antenna is proposed. Similarly, defected Ground Structure will enhance the bandwidth, return loss parameters of the antenna. Since micro strip patch antennas have a low profile, low cost, are mechanically robust and easy to fabricate, they are becoming increasingly popular in demand within a variety of applications. These are the important considerations in such antenna designs. It is basically a metal patch suspended over a ground plane. The limitations of an MSPA are its low bandwidth, low efficiency and low gain. These limitations can be addressed by using a thick substrate, cutting slots in the patch, using different shapes of patches, using different locations of feeds, using a low dielectric constant substrate and making array antennas. Researchers then represent micro strip antenna design technology differently for improvements in its radiation characteristics, size reduction, low cost etc. In the recent years, there have been several new concepts that have been applied to micro strip antenna design. Out of these concepts, the DGS is one that has been used for the design of MSPA differently.

For the purposes of improving the performance parameters of the MSPA, a technique called DGS is used. It is a technique in which the ground is intentionally modified by placing a defect of various shapes and sizes at different locations to improve the antenna performance characteristics. Depending on the shape and size of the defect, the shielded current distribution will be disturbed. This distribution will influence the input impedance and the current flow of the antenna. The excitation and electromagnetic waves propagating through the substrate layer are also controlled by DGS. Thus, with the help of DGS, we can improve and optimize the performance parameters of the antenna. The MSPA with DGS (Jian, X. C., 2005) is used in wireless communication for ISM band applications. Due to the unlicensed frequency band, the ISM band is used for many wireless communication applications in various fields. These are used in modern aerospace, vehicle and man-portable systems, cordless phones, Bluetooth devices, and wireless communication network for the purpose of frequency allocation to the ISM Band (Bharadwaj, R., 2017). The ISM band has received great attention by academicians and industrialists in the field of telecommunications. An MSPA having 1 x 4 array structure with embedded DGS used for wireless communication systems for ISM band applications is proposed in this paper.

2. Design of Microstrip Patch Antenna (MSPA)

2.1 Design of MicroStripPatchantenna - Theoretically

The Microstrip Patch Antenna for 2.4 GHz frequency and FR4 substrate is designed theoretically and then it is simulated by High Frequency Structure Simulator (HFSS) software for optimization of performance parameters (Singh, P. K., 2013).

Steps: Design of MSPA for 2.4 GHz in ISM Band

Step I - Substrate FR4. Dielectric constant: 4.4

Step II –Operative Frequency: 2.4 GHz

Step III - Calculation of Width of Patch (W) is given by equation (1),

Where, $C = 3 \times 10^8$, $\epsilon_r = 4.4$,

$f_0 = 2.4$ GHz,

Width of Patch (W_p) = 38.22 => 38 mm

$$W = \frac{c}{2f \sqrt{\frac{\epsilon_r + 1}{2}}} \quad \text{Equation (1)}$$

Step IV - Calculation of the Effective Dielectric Constant is given by equation (2).

$$\epsilon_{\text{eff}} = \frac{\epsilon_r + 1}{2} + \frac{\epsilon_r - 1}{2} \left[1 + 12 \frac{h}{w} \right]^{-\frac{1}{2}} \quad \text{Equation (2)}$$

The Effective Dielectric Constant = 3.99

Step V - Calculation of the Effective length is given by equation (3),

Effective length = 30.25mm

$$L_{\text{eff}} = \frac{c}{2f_o\sqrt{\epsilon_{\text{eff}}}} \quad \text{Equation (3)}$$

Step VI - Calculation of the length extension is given by equation (4)

$$\Delta L = 0.412h \frac{(\epsilon_{\text{eff}}+0.3)(\frac{W}{h}+0.264)}{(\epsilon_{\text{eff}}-0.258)(\frac{W}{h}+0.8)} \quad \text{Equation (4)}$$

(ΔL) = 0.70 mm

Step VII – Calculation of Length and Width of Transmission Line(LT and WT) is given by equation (5) and (6) respectively

$$LT = \lambda / (4 \sqrt{\epsilon_r}) = 14.89 \text{ mm} \Rightarrow 15 \text{ mm} \quad \text{Equation (5)}$$

$$Z_o = 377 / [[(WT / h) + 2] \sqrt{\epsilon_r}], \text{ where } Z_o = 50 \Omega \quad \text{Equation (6)}$$

WT = 2.56 mm $\Rightarrow$ 3 mm

Step VIII – Calculation of actual length of the patch is given by equation (7),

$$L_p = L_{\text{eff}} - 2\Delta L \quad \text{Equation (7)}$$

(L_p) = 28.4mm $\Rightarrow$ 28 mm

Step IX – Calculation of the ground plane dimensions(L_g and W_g) is given by equation (8) and (9) respectively

$$L_s = L_p + 2 LT = 28 + 2 \times 15 = 58 \text{ mm} \quad \text{Equation (8)}$$

$$W_s = W_p + 2 LT = 38 + 2 \times 15 = 68 \text{ mm} \quad \text{Equation (9)}$$

Figure1.2shows,the dimensions of the microstrip patch antenna for the resonant frequency of 2.4 GHz and using FR4 as a substrate. Probe feed is fabricated on the same substrate so that total structure will remain planer. It also eliminates spurious feed network radiation (Kaur, G., 2019).

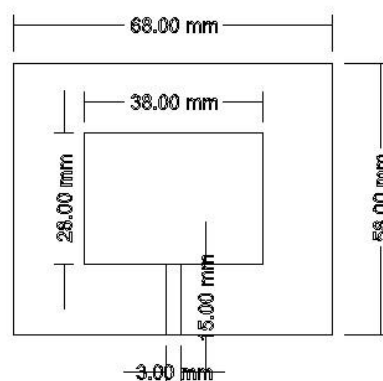


Fig.1.2- Design of MicroStripAntenna (Theoretical)

Table 1.1 shows the dimensions of the single patch Antenna designed theoretically for the resonant frequency of 2.4 GHz with FR4 as a substrate.

Table 1.1- Dimensions of single patch Antenna (Theoretical)

Input Parameters	Value
PatchWidth	38 mm
PatchLength	28 mm
Transmission LineWidth	3 mm
Transmission LineLength	15 mm
GroundPlaneWidth (Wg)	68 mm
GroundPlaneLength (Lg)	58 mm

2.2 Design of MicroStripPatchAntenna (MSPA) – With HFSS Simulation:

The Microstrip Patch Antenna is simulated with High Frequency Structure Simulator software. The parameters such as resonant frequency, VSWR, return loss, bandwidth are so optimized to get the optimized performance parameters (Dharani, K. R., 2014). Figure 1.3 shows the simulated design of the MSPA with optimized performance parameters.

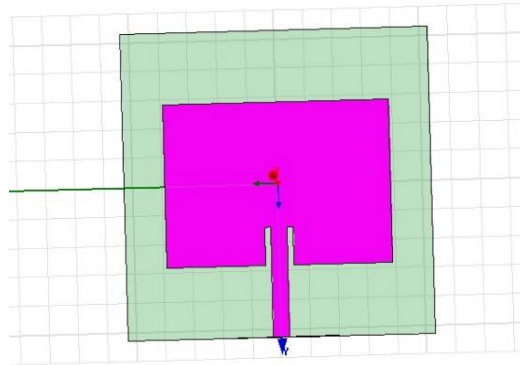


Figure1.3- Simulated design of single MicroStrip Patch Antenna

Table 1.2 shows the dimensions of the simulated design of the single microstrip patch antenna designed with HFSS software for the resonant frequency of 2.4 GHz with FR4 as a substrate.

Table 1.2- Dimensions of single patch Match Antenna (Simulation)

Input Parameters	Value
PatchWidth	38.22
PatchLength	30.25
Transmission LineWidth	1.6 mm
Transmission LineLength	15 mm
GroundPlaneWidth (Wg)	66 mm
GroundPlaneLength(Lg)	58 mm

2.3 Simulation Results: Single Patch Antenna

Figure 1.4 shows the return loss of MSPA which is -18.57 dB. Figure 1.5 shows the VSWR of MSPA which is 1.26. The figure 1.6 shows the radiation pattern of the MSPA. Figure 1.7 shows the 3 D polar plot indicating the radiation and gain.

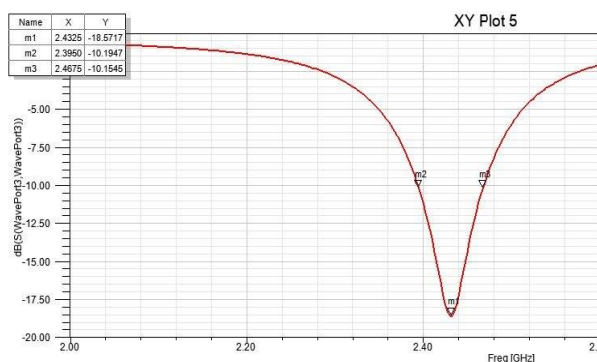


Fig. 1.4 - Return Loss for single patch Antenna.

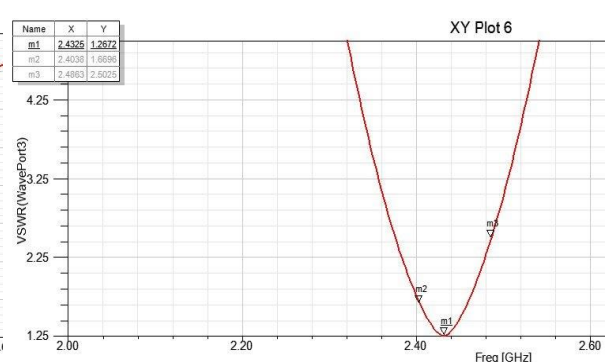


Fig. 1.5- VSWR for single patch Antenna.

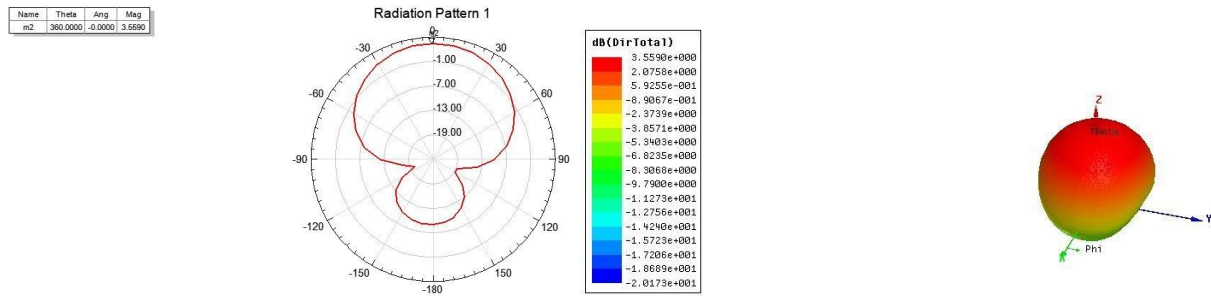


Fig.1.6- Radiation Pattern of for single patch MSPA. **Fig.1.7-** 3-D Polar Plot of Single MSPA

2.4 Defected Ground Structure

The performance parameter of the antenna can be improved by making a defect in the ground called Defected Ground Structure. It is created intentionally. The basic component is making a resonant gap or slot made in the ground. It is placed directly on the transmission line. By creating the various shapes, DGS is realized. These shapes are used to create a defect in a ground structure. Depending on the size and shape of the defect, current distribution is disturbed. This distribution will influence the input impedance and the current flow of the antenna. The excitation and electromagnetic waves propagating through the substrate layer are also controlled by DGS. Thus, with the help of DGS, we can improve and optimize the performance parameters of the antenna.

There are two types of DGS. One is Single and the other is Periodic. Periodic DGS is formed by repeating the shape of the single DGS. While forming Periodic DGS, its shape, distance between two DGS, and the distribution pattern of DGS are considered. DGS changes current distribution in the ground plane of the microstrip line. It will change the values of inductance and capacitance. The duplication of a single cell in a periodic pattern gives much better results and better characteristics. DGS acts as an L-match circuit. During the transmission of an RF signal through DGS to the microstrip line, strong coupling occurs between DGS and the line. The Figure 1.8 shows the microstrip patch antenna with DGS.

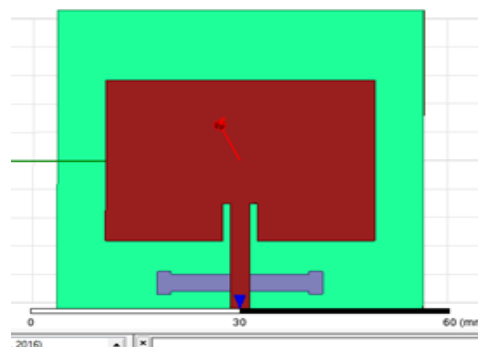


Fig.1.8 –Microstrip antenna with DGS

2.5 1 x 4 Microstrip Patch Array Antenna

A microstrip patch antenna with a four-element antenna array employing a defected ground structure is investigated. Microstrip patches constitute a prime candidate for the elements of an integrated phased array. Such arrays may include active devices on the same substrate, integrated monolithically, and operate at ISM Band frequencies. Design of these arrays depends upon understanding the effects of substrate thickness, dielectric constant, and grid spacing. The input impedance is calculated so as to feed the input signal to all the elements with minimum attenuation. The Figure 1.9 shows the 1 x 4 microstrip array antenna.

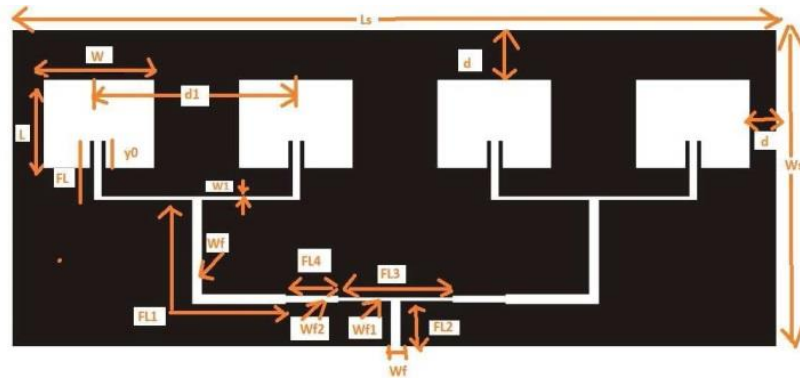


Fig.1.9– 1 x 4 microstrip array antenna

2.6 Simulation of 1x 4 Microstrip Patch Antenna

Figure 1.10 shows the 1 X 4 Micro strip Array Antenna with a single wave port of 50Ω. Quarter Wave Matching Technique is used for equal distribution of current in the array.

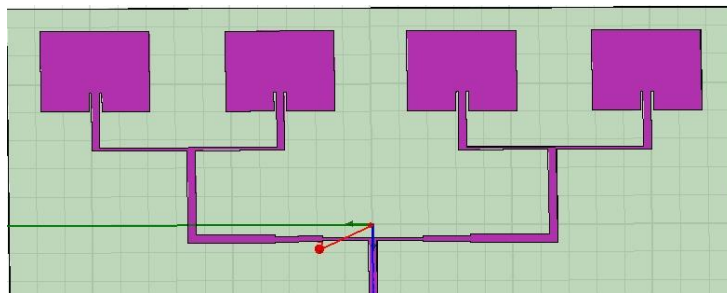


Fig.1.10 Simulation of 1X4 array microstrip antenna with HFSS

2.7 Simulation Results: 1x 4 MSPA Array Antenna

Figure 1.11 shows the return loss of MSPA which is -27.32dB. Figure 1.12 shows the VSWR of MSPA which is 1.08. Figure 1.13 shows the radiation pattern of the MSPA. Figure 1.14 shows the 3 D polar plot indicating the radiation and gain.

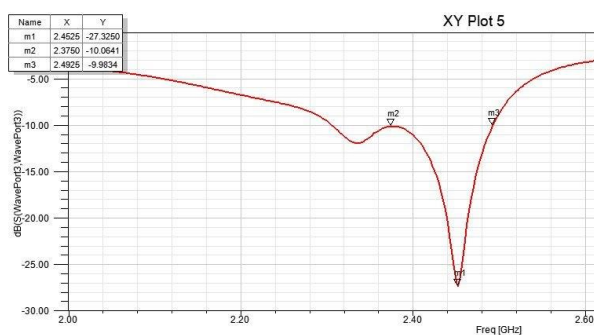


Fig.1.11 - Return Loss of 1 x 4 MSPA Array

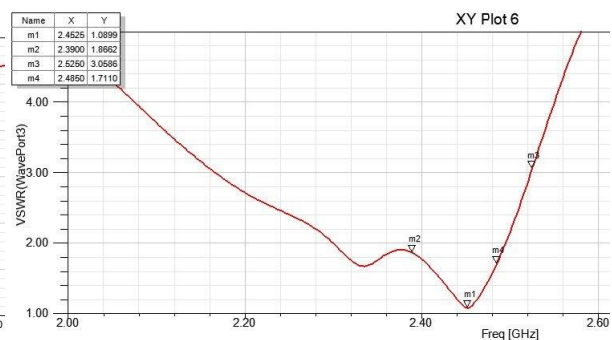


Fig.1.12- VSWR of 1 x 4 MSPA Array

Name	Theta	Ang	Mag
m1	300.0000	-0.0000	6.5777


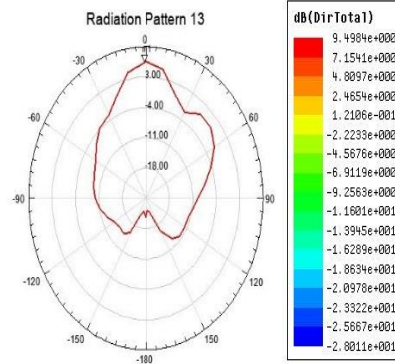


Fig.1.13 - Radiation Pattern of 1 x 4 MSPA Array. **Fig.1.14** - 3 D Polar Plot of 1 x 4 MSPA Array

2.8 Simulation of 1x 4 Microstrip Patch Antenna with DGS

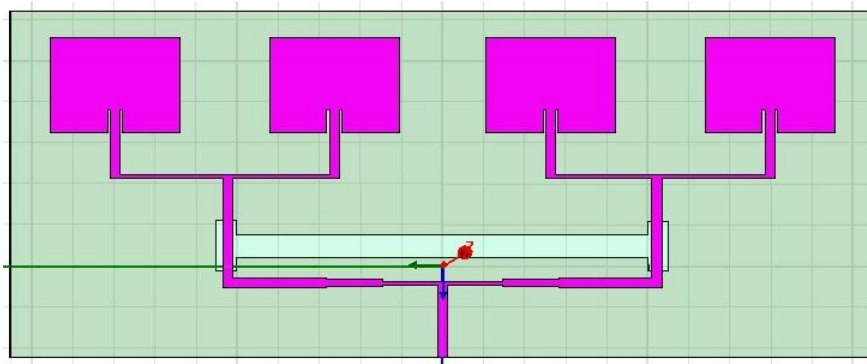


Fig.1.15 -HFSS Simulation of 1X4 Microstrip array antenna with DGS

Figure 1.15 Shows 1 X 4 Micro strip Array Antenna with Defected ground structure. Defected Ground Structure is used above the Wave Port. Defected Ground Structure is Creating Defect in the Ground plane of the antenna. Due to Defected Ground Structure, there is change in the Current Distribution of antenna.

2.9 Simulation Results: 1 x 4 MSPA Array Antenna with DGS

Figure 1.16 shows the return loss of MSPA which is -22.58dB. Figure 1.17 shows the VSWR of MSPA which is 1.1604. Figure 1.18 shows the radiation pattern of the MSPA. Figure 1.14 shows the 3 D polar plot indicating the radiation and gain.

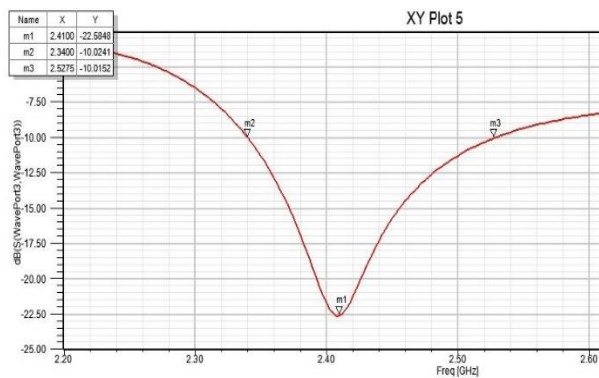


Fig.1.16- Return Loss of 1 x 4 Array with DGS

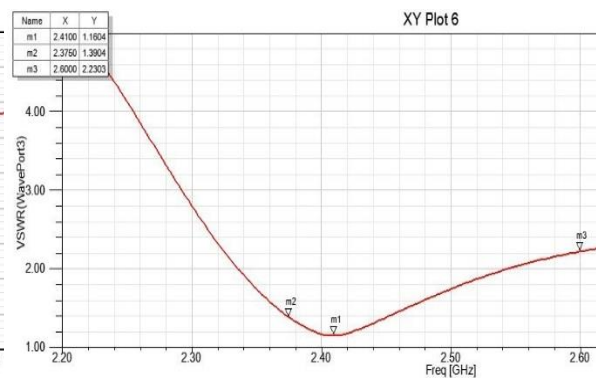


Fig.1.17- VSWR of 1 x 4 Array with DGS

Name	Theta	Ang	Mag
m1	360.0000	-0.0000	10.4067

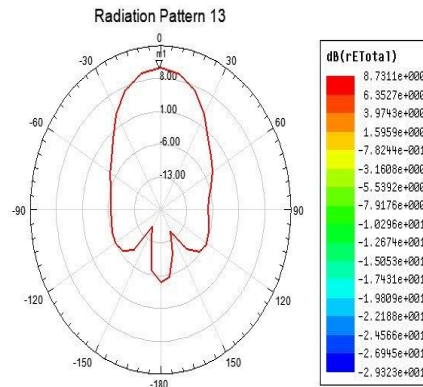


Fig.1.18- Radiation Pattern of 1 x 4 Array with DGS




Fig.1.19- 3 D Polar Plot of 1 x 4 Array with DGS

Table 1.3- Comparison between Various Micro strip Array Antenna parameters with simulated results

Type of MSA	Frequency (GHz)	Return loss (dB)	VSWR	Band width (MHz)	Gain (dB)
Single patch	2.43	-18.57	1.26	72.5	3.55
1 x 4 Patch Array	2.45	-27.32	1.08	117.5	9.49
1 x 4 Patch Array DGS	2.41	-22.58	1.16	187.5	8.73

3. Fabrication of Antennas

Figure 1.20 and 1.21 shows the Patch and Ground of single Microstrip patch Antenna respectively. Figure 1.22 and 1.23 shows the Patch and Ground of 1x4 Microstrip Array Antenna respectively. Figure 1.24 and 1.25 shows the Patch and Ground of 1x4 Microstrip Array Antenna with DGS respectively.



Fig 1.20- Single Element MSPA Patch



Fig 1.21- Single Element MSPA Ground



Fig 1.22- 1 x 4 Element MSPA Array Patch



Fig 1.23- 1 x 4 Element MSPA Array Ground



Fig 1.24- 1 x 4 Element MSPA Array Patch with DGS **Fig 1.25- 1 x 4 Element MSPA Array with DGS Ground**

4. Testing of Antennas

The Figure 1.26 shows the testing of MSPA. The Figure 1.27 shows the testing of 1 x 4 Array MSPA. Figure 1.28 and Figure 1.29 shows the testing of 1 x 4 Array MSPA with DGS



Fig 1.26 - Testing of MSPA

Fig 1.27 – Testing of 1 x 4 Array MSPA



Fig 1.27 – Testing of 1 x 4 Array MSPA with DGS **Fig 1.28 – Testing of 1 x 4 Array MSPA with DGS**

5. Parametric Results after Fabrication of Antennas

The Figure of

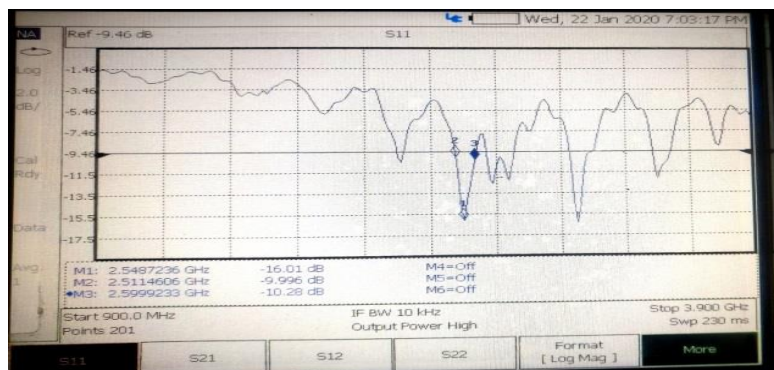


Fig Return Loss of Single Element Microstrip Patch Antenna

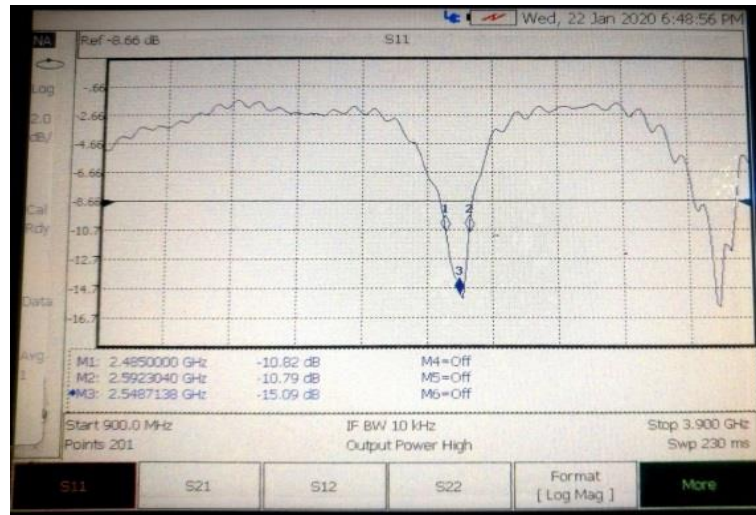


Fig Return Loss of 1 x 4 Microstrip Patch Array Antenna



Fig Return Loss of 1 x 4 Microstrip Patch Array Antenna with DGS

Table 1.4- Comparison of Fabricated Antenna Results

MSPA	Freq. (GHz)	Return loss (dB)	VSWR	Band width (MHz)	Gain (dB)
Single	2.54	-16	1.37	88	3.5
1x4 Array	2.54	-15	1.43	107	7.5
1x4 Array DGS	2.43	-13	1.57	110	10

Table 1.4 shows the Comparative study of performance of MicroStrip Single Patch Antenna to 1x4 Patch array antenna and 1x4 Patch array antenna with DGS. As the number of patches of antenna increases, bandwidth and gain of antenna increases.

6. Conclusion

The 1 x 4 microstrip array antenna structure with and without DGS has been successfully designed. It is simulated by using HFSS software. The performance parameters include Return loss, VSWR, Bandwidth, Radiation pattern and Gain in the proposed design. The 1x4 microstrip array antenna with defected ground structure as low profile, low weight and having thin substrate working in ISMB and . Out of the three configurations of antennas, the Single Patch Antenna provides the average values of antenna performance parameters. Single Patch MSPA has return loss of -16 dB, VSWR of 1.67, bandwidth of 88 MHz and gain of 3.5 dB. The 1 x 4 Patch Array Antenna provides the better values of antenna performance parameters. The 1 x 4 Patch Array MSA has return loss of -15 dB, VSWR of 1.43, bandwidth of 107 MHz and gain of 7.5 dB. The 1 x 4 Patch Array Antenna with DGS provides the improved values of antenna performance parameters. The 1 x 4 Patch Array

MSA with DGS has return loss of -13 dB, VSWR of 1.57, bandwidth of 110 MHz and gain of 10 dB. The bandwidth of 1 x 4 Array Antenna with DGS is improved to 110 MHz with respect to 88 MHz, the bandwidth of Single Patch Antenna. The gain of the 1 x 4 Array Antenna with DGS is improved to 10 dB with respect to 3.5 dB, the gain of Single Patch MSA. Thus array antenna with DGS improves the gain as well as bandwidth to some extent.

Therefore, it can be concluded that the performance parameters of the 1 x 4 Microstrip Array Antenna with DGS have improved as compared with the Single Patch Microstrip Antenna. These results are tested and measured at the millimeter wave and antenna lab of DRDO, India. These antennas are used in the ISM band applications.

7. Future Scope

The requirement of today's communication systems is to reduce the size of wireless device. Researchers and scientists in the world are moving towards systems that are smaller and smaller in size and towards the miniaturization (Gautam, C. S., 2012) by optimizing the performance parameters. With the use of fractal techniques, size of the 1 x 4 Microstrip Array Antenna with DGS can be reduced further for wireless communication applications. The array elements can be increased to increase the gain as per requirement of applications. This can be considered in the future scope of 1 x 4 Microstrip Array Antenna with DGS.

8. Acknowledgment

The results of Single MSA, 1 x 4 Microstrip Array Antenna - without DGS and with DGS are tested and measured in the millimeter wave and antenna lab of DRDO, India. I am very much thankful to the authority of DRDO for facilitating me to test and measure the experimental results of antennas.

9. References

1. Afyf, A., Bellarbi, L., Errachid, A., & Sennouni, M. A. (2015, March). Flexible microstrip CPW slotted antenna for breast cancer detection. In 2015 International Conference on Electrical and Information Technologies (ICEIT) (pp. 292-295). IEEE.
2. Ajay, V. G., Parvathy, A. R., & Mathew, T., "Microstrip antenna with DGS based on CSRR array for WiMAX applications," International Journal of Electrical and Computer Engineering, 9(1), 157, 2019.
3. Arunkarthikeyan K., Balamurugan K. & Rao P.M.V (2020) Studies on cryogenically treated WC-Co insert at different soaking conditions, Materials and Manufacturing Processes, 35:5, 545-555, DOI: [10.1080/10426914.2020.1726945](https://doi.org/10.1080/10426914.2020.1726945)
4. Babu, U.V., Mani, M.N., Krishna, M.R. and Tejaswini, M., 2018. Data Preprocessing for Modelling the adulteration detection in Gasoline with BIS. *Materials Today: Proceedings*, 5(2), pp.4637-4645.
5. Banu, S., Vishwapriya, A., & Yogamathi, R. (2013, July). Performance analysis of circular patch antenna for breast cancer detection. In 2013 Fourth International Conference on Computing, Communications and Networking Technologies (ICCCNT) (pp. 1-7). IEEE.
6. Bharadwaj, R., "Design of micro-strip patch antenna array using DGS for ISM band applications," Glob J Res Rev, 4, 1-4, 2017.
7. Çalışkan, R., Gültekin, S. S., Uzer, D., & Dündar, Ö. (2015). A microstrip patch antenna design for breast cancer detection. *Procedia-Social and Behavioral Sciences*, 195, 2905-2911.
8. Dharani, K. R., Sampath, P., Soukath, A. K., Pavithra, D., & Renuga, D. M. (2014, February). Design and simulation of microstrip phased array antenna for biomedical applications. In 2014 International Conference on Electronics and Communication Systems (ICECS) (pp. 1-6). IEEE.
9. Ezhilarasi, T.P., Kumar, N.S., Latchoumi, T.P. and Balayesu, N., 2021. A Secure Data Sharing Using IDSS CP-ABE in Cloud Storage. In *Advances in Industrial Automation and Smart Manufacturing* (pp. 1073-1085). Springer, Singapore.
10. Gautam, A. K., Kumar, L., Kanaujia, B. K., & Rambabu, K., "Design of compact F-shaped slot triple-band antenna for WLAN/WiMAX applications," IEEE Transactions on Antennas and Propagation, 64(3), 1101-1105, 2015.
11. Gautam, C. S., & Bhadauria, A. (2012, December). 2D defected ground structures in microstrip line. In 2012 5th International Conference on Computers and Devices for Communication (CODEC) (pp. 1-4). IEEE.
12. Ghaloua, A., Zbitou, J., El Abdellaoui, L., Errkik, A., Tajmouati, A., & Latrach, M., "A miniature circular patch antenna using defected ground structure for ISM band applications," In *Proceedings of the 2nd International Conference on Computing and Wireless Communication Systems* (pp. 1-5), 2017.
13. Jia, L. L., Jian, X. C., Quan, X., Jian, P. W., Wei, S., and Liang, J. X., "Compact microstrip low pass filter based on defected ground structure and compensated microstrip line," IEEE Explorer, 0-7803-8846-1/05/ IEEE, pp: 1-4, 2005.

14. Kaur, G., Singla, G., & Kaur, S. (2013). Design of Wideband Micro strip Patch Antenna Using Defected Ground Structure for Wireless Applications. *International Journal of Advanced Research in Computer Science and Software Engineering*, 3(10), 762-765.
15. Nalam, M., Rani, N., & Mohan, A. (2014). Biomedical application of microstrip patch antenna. *International Journal of Innovative Science and Modern Engineering (IJISME)*, 2(6), 6-8.
16. Shrestha, S., Agarwal, M., Reid, J., &Varahramyan, K. (2010, July). Microstrip antennas for direct human skin placement for biomedical applications. In *PIERS Proceedings*.
17. Singh, P. K., Tripathi, S. K., Sharma, R., & Kumar, A. (2013). Design & simulation of microstrip antenna for cancer diagnosis. *International Journal of Scientific & Engineering Research*, 4(11), 1821-1824.
18. Stang, J. P., &Joines, W. T. (2008, June). Tapered microstrip patch antenna array for microwave breast imaging. In *2008 IEEE MTT-S International Microwave Symposium Digest* (pp. 1313-1316). IEEE.
19. Weng, L. H., Guo, Y. C., Shi, X. W., & Chen, X. Q. (2008). An overview on defected ground structure. *Progress In Electromagnetics Research*, 7, 173-189.
20. Yarlagaddaa, J. and Malkapuram, R., 2020. Influence of carbon nanotubes/graphene nanoparticles on the mechanical and morphological properties of glass woven fabric epoxy composites. *INCAS Bulletin*, 12(4), pp.209-218.
21. Yarlagaddaa, J., Malkapuram, R. and Balamurugan, K., 2021. Machining Studies on Various Ply Orientations of Glass Fiber Composite. In *Advances in Industrial Automation and Smart Manufacturing* (pp. 753-769). Springer, Singapore.