

## **Examining the Applicability of Micro-Pile for Bridge Foundation in Difficult Terrain using Pile Load Test**

**Mohd. Zain<sup>1</sup>, Prof. (Dr.) Rakesh Varma<sup>2</sup>, (Dr.) Ranjendra Kumar Srivastava<sup>3</sup>**

<sup>1</sup>Phd Scholar and Assistant Professor Shri Ramswaroop Memorial University

<sup>2</sup>Retired Chief Engineer Level I Irrigation Department U.P., Professor Shri Ramswaroop Memorial University

<sup>3</sup>Retired Engineer in Chief UP P.W.D. and Retired M.D. U.P. Bridge Corporation

**Article History:** Received: 11 January 2021; Revised: 12 February 2021; Accepted: 27 March 2021; Published online: 10 May 2021

**Abstract:** Construction of foundation of bridges in remote hilly terrain, in adverse climatic condition, is very difficult due to the limited working period and unavailability of transportation of machinery and equipment. In such situations where regular pile foundation is not feasible, micro-piles prove to be better solution. The study deals with the conditions in the field, field testing of micro-piles and their applicability as bridge foundation. In remote areas and difficult hilly terrains there are several problems faced during construction of bridges. The hilly atmosphere has oxygen deficiency, negative temperatures, chilling cold, snowfall, frozen water bodies, lack of adequate transportation facilities and roads are some of the innumerable problems faced during construction. A number of environmental conditions allow only a limited period for construction which is hardly four-five hours a day. Considering the terrain and hydraulic factors at such sites there is limited option of foundation for the bridges. Usually such terrain has cobbles/gravels in the river bed. The seepage rate is likely to be very high. The high seepage rate requires heavy de-watering works while undertaking construction of substructure. Also such heavy concreting will be time consuming. Since, the time slot for construction is limited, regular procedures do not work.

Based on scour criteria, for such heavy loads as on bridges deep foundations are suitable but boulders, cobbles in such area do not allow sinking of well foundation, leaving us with only one option – piles. However, due to limited transportation facilities, roadways, it is not possible to transport such heavy rigs to such remote and inaccessible areas. Therefore, micro-piles are the most suitable option for bridge foundation considering all the above factors and limitations. A micro-pile is a small-diameter drilled and grouted non-displacement pile that is typically reinforced. It is constructed by drilling a borehole, placing steel reinforcement, and grouting the hole and can bear axial loads as well as lateral loads. They are suitable and can be installed in restrictive areas and in all soil types and ground conditions. In India, the use of micro-piles has been restricted only to slope stabilization in hydro projects and earth retaining structures and not in bridge foundation and therefore, it will be a new area for future endeavors.

**Key words:** Micro-Pile, Field Load-Settlement Test, Bridge Foundation.

### **Introduction**

#### **History of Micro-Piles**

Micro-piles were first conceived in Italy in early in 1950s, in response to the demand for innovative techniques for underpinning historic buildings and monuments that sustained damage at that time. An Italian contractor, Fondedile and Dr. Fernando Lizzi developed this technique, it was a reliable method support structural loads with minimal disturbances to the existing structures. Thereafter use of micro-piles gained significance and were used as units for foundation support to counter static and seismic loading conditions and as in situ reinforcements for slope and excavation stability.

Since then, micro-pile technology has evolved to cover a variety of applications: underpinning for existing foundations, in-situ soil reinforcement, and seismic retrofitting. In last 20 years, however, time has witnessed a significant expansion from use in low-capacity micro-pile networks to employment as single high-capacity foundations. One type of the popular micro-piles being used in the foundation industry nowadays is the hollow bar micro-pile, which facilitate fast installation with a high degree of ground improvement.

#### **Sub-Surface Investigation**

A case study for Leh-Ladakh region was taken up. The sub-surface investigation (SSI) was carried out by bore holes of 40m depth each at the planned abutments and intermediate pier locations for the SSI. It was planned for two test piles at each location to be driven up to a depth of 20m and tested for vertical static load which will be twice the design load or up-to the pre-mature failure limit. Results obtained from SSI and micro pile testing shall be utilized for the design and subsequent construction of micro pile foundation for design of appropriate substructure and superstructure.

The specifications of micro pile consist of 273 mm outer diameter steel casing with M-35 grade cement grout filled inside at a pressure of 4 to 5 bar, re-drilled to place four nos. 32 mm diameter longitudinal bars with a centralizer to maintain spacing. This micro pile shall be tested for static load as per IS 2219 Part IV. The bore

holes were to be drilled. Standard penetration test(SPT) to be conducted in bore hole at the depth of every three meters or refusal. The collection of disturbed and un-disturbed soil sample for lab test was to be undertaken. And results were to be analyzed for type of soil strata, water table & safe allowable bearing capacity.

**Tests Conducted**

**Field Tests**

- a) Boring at the proposed site to ascertain the type of soil strata at the requisite depth and collection of soil samples, both disturbed and undisturbed by boring tools.
- b) SPT conducted for measuring the penetration resistance of the soil, which is measure of its bearing capacity.
- c) Depth of Water Table was to be determined.

**Laboratory Test**

- a) Bulk Density, Moisture content was determined for samples collected in field.
- b) Particle size analysis was carried out as per IS 2720 (Part-4).
- c) Atterberg’s Limits were determined as per IS 2720 Part- 5 1985.

**Test Results**

The test result showed that stratum consists of coarse sand, gravel and rock. The results are tabulated below:

**Table 1: Test Results**

Depth Below G.L. in meter	Soil Classification on As per IS:1498	Standard Penetration Value (N)	Atterberg Limits of Fraction Passing 425 mic Sieve		Sieve Analysis			Shear Test	
			Liquid Limit	Plastic Limit	Gravel	Sand	Silt + Clay	Cohesion (C) Value Kg/cm <sup>2</sup>	Angle of Internal friction
3	Sandy Gravel (GP)	76	22	NP	69.3	30.2	0.5	Nil	44
6	Sandy Gravel (GP)	110	23	NP	66.3	31.2	2.5	Nil	50
9	Sandy Gravel (GP)	81	24	NP	50.9	47.6	1.5	Nil	45
12	ROCK	>100 REFUSED	-	NP	100	-	-	Nil	-
15	ROCK	>100 REFUSED	-	NP	100	-	-	Nil	-
18	ROCK	>100 REFUSED	-	NP	100	-	-	Nil	-
21	ROCK	>100 REFUSED	-	NP	100	-	-	Nil	-
24	ROCK	>100 REFUSED	-	NP	100	-	-	Nil	-
27	ROCK	>100 REFUSED	-	NP	100	-	-	Nil	-
30	ROCK	>100 REFUSED	-	NP	100	-	-	Nil	-

**Table 2: Results at Ground Level to 3-Meter Depth**

S.N	Parameter	Unit	Test Methods	Result
-----	-----------	------	--------------	--------

1.	Sieve Analysis Sieve Size (mm)			Cumulative % passing by weight
	20.0			86.9
	10.0			78.2
	4.75	%	IS:2386(P-1)-1963	67.1
	2.0			53.8
	0.425			16.7
	0.075			3.2
2	Shear test			
	Cohesion (C) Value	Kg/cm <sup>2</sup>	IS:2720(P-13)-1986 ( Reaffirmed 2002)	Nil
	Angle Of Internal Friction	Degree	,----Do-----	38
	Chemical Test			
1	pH value at 25 degree Celcius	-	SRTL/SOP	7.54
2	Sulphate	%	SRTL/SOP	0.01
3	Chloride	%	SRTL/SOP	0.04

**Table 3: Results at 12 Meter to 15 Meter**

S.N	Parameter	Unit	Test Methods	Result
1.	Sieve Analysis Sieve Size (mm)			Cumulative % passing by wt
	20.0			96.5
	10.0			81.9
	4.75	%	IS:2386(P-1)-1963	60.7
	2.0			45.4
	0.425			15.9
	0.075			5.9
2	Shear test			
	Cohesion (C) Value	Kg/cm <sup>2</sup>	IS:2720(P-13)-1986 (Reaffirmed 2002)	Nil
	Angle Of Internal Friction	Degree	,-----Do-----	40
	Chemical Test			
1	pH value at 25 degree Celcius	-	SRTL/SOP	7.54
2	Sulphate	%	SRTL/SOP	0.008
3	Chloride	%	SRTL/SOP	0.007

**Table 4: Results at 15 Meter To 33 Meter (Average Values)**

S.N	Parameter	Unit	Test Methods	Result
1.	Sieve Analysis Sieve Size (mm)			Cumulative % passing by wt
	20.0			86.1
	10.0			58.0
	4.75	%	IS:2386(P-1)-1963	39.0
	2.0			28.9
	0.425			11.4
	0.075			2.3
2	Shear test			
	Cohesion (C) Value	Kg/cm <sup>2</sup>	IS:2720(P-13)-1986 ( Reaffirmed 2002)	Nil
	Angle Of Internal Friction	Degree	,-----Do-----	42
	Chemical Test			
1	pH value at 25 degree Celcius	-	SRTL/SOP	7.54
2	Sulphate	%	SRTL/SOP	0.01
3	Chloride	%	SRTL/SOP	0.04

**Static Load (Lateral) Testing on Pile  
 Micro-Pile Load Test Results**

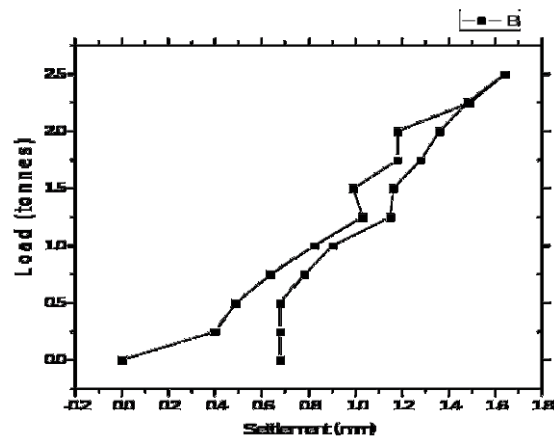


Figure 1: Graph: Load vs Settlement for Single Pile.

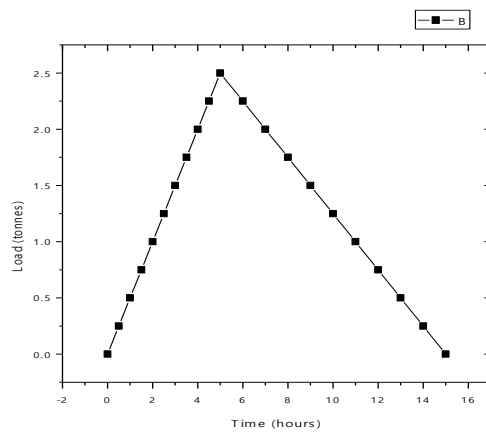


Figure 2: Graph: Load vs Time for Single Pile.

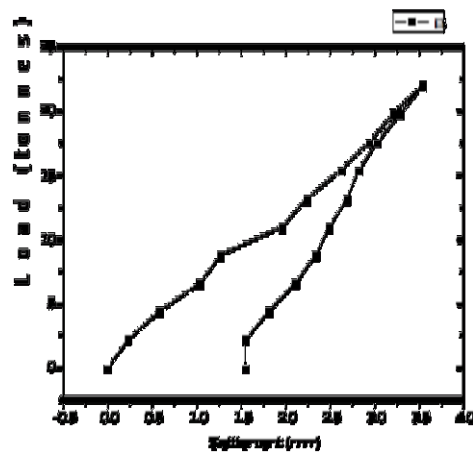


Figure 3: Graph: Load vs Settlement for Pile Group.

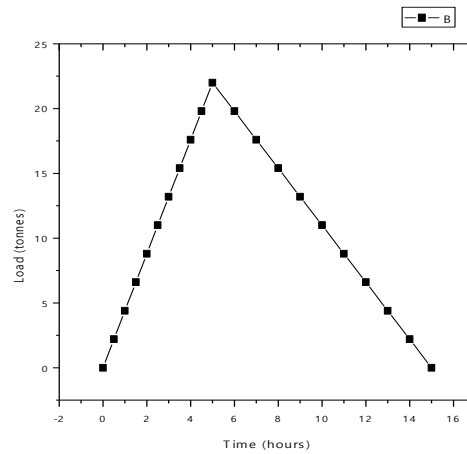


Figure 4: Graph: Load vs Time for Pile Group.

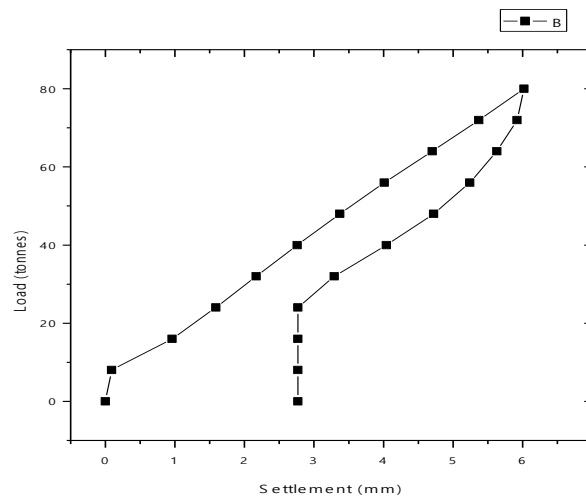


Figure 5: Graph: Load vs Settlement.

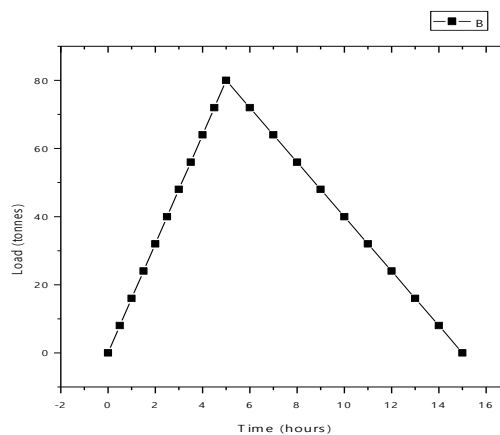


Figure 6: Graph: Load vs Time.

### **Recommendation of Pile Load Test**

#### **For Vertical Load Test**

It is evident from load-settlement graph/ table that pile has attained 80MT load and the corresponding deflection achieved is less than 12 mm so the pile capacity may be taken as  $80 \times \frac{2}{3} = 53.3$  MT as mentioned in IS2911:1985 PART-IV TH which may be safely adopted in design.

#### **For Lateral Load Test**

It is evident from load-settlement graph or table that load applied on pile is 2.5MT and corresponding deflection achieved is less than 5mm as mentioned in IS2911:1985 PART-IV so pile capacity may be taken as 1.25 MT as a safe lateral load in the design.

#### **For Group Pile Lateral Load Test**

It can be observed from load-settlement graph or table that the load applied on the pile is 22MT and deflection achieved is less than 5mm as mentioned in IS2911:1985 PART-IV. So pile capacity can be taken as 11MT which is safe lateral load and may be adopted in design.

### **Results and Discussion**

The design of substructure and foundation have been based on SSI report and pre-production micro-pile load test results:

#### **SSI Report**

The result of SSI reveals the fact as under-

- Normally the type of soil encountered is “Sandy Gravel” (GP) with average SPT value 80
- The average value of angle of internal friction  $\Phi = 40^\circ$
- Submerged density of soil is  $10T/m^3$
- Relevant characteristics of ground water are as under: -
  - pH value = 7.54
  - Sulphate content = 0.01%
  - Chloride content = 0.04%

#### **Pile Load Test Result**

The results of pre-production pile load test have been listed below. However, the micro-pile with length 21m, outer diameter = 273mm, casing thickness 8mm, given stiffness factor  $T = 1.3$  is flexible and slender.

- Safe lateral load capacity of micro-pile is found to be 1.8 Ton and 11 Ton acting alone and in a group respectively
- The vertical load carrying capacity of pile is 32 Ton in normal conditions and 40 Ton in seismic condition.
- The worst vertical load expected on a pile is 23.4 Ton which is smaller than 32 Ton, hence safe.
- The micro-piles have been planned as flexible compression member and to take large lateral load and bending moment, the outer peripheral piles have been battered at  $10^\circ$  with vertical.

### **Conclusions**

The problems owing to high altitude, remoteness, weather constraints and other difficulties as explained earlier can be overcome by micro-piles. Application of micro-pile for bridge foundation in submergence in river is debatable issue, as IRC78-2014 Section 9 Pile foundation in its clause 709.1.7 enumerates that minimum allowable diameter of bored pile should be 1000 mm for river water zone and 750 mm for bridge on land such as viaducts and ROBs etc. However, IRC: SP109-2015 permits use of small diameter pile in special circumstances. Based upon the success results, the design of micro-pile foundation and sub structure would be carried out. It is expected that this work would be considered as a distinguishing milestone in the era of bridge construction in similar difficult situations, repair and rehabilitation of endangered structures

**References**

1. EsmailiM, Khayyer F and Nik G Efficiency of micro piles in reinforcing embankments. ICE Proceedings Ground Improvement Volume 167 Issue G12. (2014)
2. Carroll, R. et al. Field experiments at three sites to investigate the effects of age on steel piles driven in sand. ICE Geotechnique Volume 70 Issue 6, June, 2020, pp. 469-489.
3. Baldwin Z, Bell A and Martin J, Innovative use of micro-pile groups to replace hand dug under ream piles at 5 Broadgate, London ICE Proceedings of the XVI ECSMGE Geotechnical Engineering for Infrastructure and Development (2015)
4. AbdElaziz, A.Y & El Naggar, M.H., Performance of Hollow Bar Micro-piles under Axial and Lateral Loads in Cohesive Soils (2012)
5. Benett, J.K. and Hothem, Hollow Bar Micro-piles for Settlement Control in Soft Clays (2010)
6. Bishop, J.A., et al, Class I and Class II Micro-piles with Hollow Bar Reinforcement Load Tests and Performance Measurements (2006)
7. Bruce, D.A. and Yeung ,C.K., A Review of Micro-piling with particular regard to Hong Kong (1984)
8. Bruce, D.A., et al Micro-piles, The State of Practice Part I (1997)
9. Cadden, A.J., et al, Micro-piles: Recent Advances and Future Trends (2004)
10. Cavey, J.K., et al, Observations of Mini-pile Performance under Cyclic Loading Conditions (2000)
11. Elkasabgy, M., and El Naggar, M.H., Finite Element Analysis of Axial Capacity of Micro-piles (2007)
12. Federal Highway Administration (FHWA 2005) Micro-piles Design and construction Mc Lean VA: US department of Transportation.
13. Gomez, J.E., Rodriguez et al, Hollow Core Bar Micro-pile –Installation, Testing and Interpolation of Design Parameter (2007)
14. Han, J., Ye, S., A Field Study of Behavior of a Foundation Underpinned by Micro-piles (2006)
15. Holman, T.P. and Tuozzolo, T.J., Advanced Interpretation of Instrumented Micro-piles Load Tests (2006)
16. International Building Code (IBC) (2006)
17. IRC SP 109 (Indian code on Micro-pile)
18. IS 2911 Part I to IV.
19. Jeon, S., and Kulhawy, F.H., Evaluation of Axial Compression Behavior of Micro-piles (2001)
20. Poulos, H.G, & Davis, E.H. Pile Foundation Analysis and Design. John Wiley and Sons, (1980)
21. Richards, T.D. and Rothbauer, M.J., Lateral Load on in Micro-piles (2004)
22. Russo, G., Full Scale Load Test on Instrumented Piles (2004)
23. Thompson, P., et al, Axial Compression, Tension and Lateral Load Response of A Pre-Production Micro-piles (2006)