

Survey: A wide and deep neural network with their implementation

**Akmam Majed Mosa¹, Salam Allawi Hussei², Mustafa Asaad Hasan³, Rusul A. Salman⁴
Hayder A. Jwadhari⁵**

¹Al Qasim Green University, Iraq

²College of science & Information Technology, University of Al-Qadisiyah, Iraq

³University of Thi-Qar

⁴Al Qasim Green University, Iraq

⁵Al Qasim Green University, Iraq

¹akmammajed@uoqasim.edu.iq, ²salam.allawi@qu.edu.iq, ³mustafa.alkhafaji@utq.edu.iq,

¹haider.satar@uoqasim.edu.iq

Article History: Received: 10 January 2021; Revised: 12 February 2021; Accepted: 27 March 2021; Published online: 10 May 2021

Abstract: The notion concerning a neural community capable concerning transcribing ethnical composition has long gone beyond a list in accordance with turning into an almost insignificant task. Neural networks started out abroad as like simply a mathematical concept, no longer something that may want to remain performed together with the technological know-how degree of the time, however above period the thoughts grew and the science eventually caught up. ANNs commenced including an assignment via McCulloch and Pitts whichever described up to expectation sets concerning easy devices (artificial neurons) could operate entire viable logic operations or hence stay capable regarding normal computation. In 1985, Rumelhart, McClelland, yet Hinton determined a powerful study regime that allowed them to educate ANNs together with various black units. Actually, flagrant neural networks (DNNs) are awfully utilized because of extraordinary features and have performed state-of-the-art performances. In its record review an overview present day concerning the research touching DNNs' implementations are presented. As because the large awful neural networks, we showed the purpose for the appearance of this kind regarding network, the features, the architecture over these networks, the learning strategies used, as differentiates this networks beside the traditional networks. After the suggestion of an algorithm of fast learning for deep networks through 2006, the deep learning methods have induced regularly-growing study attention for the reason of their intrinsic ability to overcome the disadvantage of classical algorithms conditional on manually-prepared characteristics. Deep learning strategies have further been discovered to be proper for huge data examination with prosperous applications to computer vision, pattern recognition, etc. In this paper, we consider several architectures of widely-used deep learning with their functional applications. A modern summary is presented on some deep learning architecture, wide Deep Neural Networks Implementations, traditional neural network, embedding vector. Various kinds of deep neural networks are viewed and modern forwards are compiled. Employment of deep learning methods on remarkable chosen fields also analyzed.

1. Introduction

Recently, an attention within machine discipline and especially extreme neural community (DNN) strategies to that amount hold major remarkably. Now, this algorithm furnish employ for several more than a few domains, such as much bio-medical because physical sign analysis, an pecuniary area because of advertising cost prediction, chance estimation, traffic area because auto discovery [1] yet array [2], etc. In this fields, supplied variety input datasets according to educate DNN fashions the fashions might also achieve a ideal overall performance so trying out by means of take a look at datasets. However, through applications increasing, the complexity on count concerning DNN turns within over yet up. In hardware area, strength shame or consumption, intelligence demands, and value about computation have become the difficult challenges. The purpose about it report is according to stricture an overview regarding the studies respecting DNNs' purposes yet implementations concerning many fields such as on-chip then automated manner for constructing and initializing sound feed forward neural networks depending of selection trees. Regression and alignment problems including sparse inputs may solve through linear fashions together with nonlinear characteristic transformation. Save regarding applications interactions above a wide employ beyond the across production characteristic transformations are potent yet explainable, while generalization wants extra function engineering effort. With fewer applications engineering, extreme neural networks might also generalize well in accordance with perdu characteristic town council above low-dimensional cubic embedding's discovered because the rare features. However, flagrant neural networks along inclusions perform through -generalize then propose minimum appropriate items when the user-item interactions are sprinkled and high-rank. Also among it report wish comment an overview on the learning in relation to vast flagrant neural community like wide lesson because recommender systems.

2. Deep Learning Methods

Deep discipline is a kind of laptop instruction method such as multi-level representation learning, so initialize from raw statistics input yet steadily gets after greater summary degrees via nonlinear transformations. With adequate education facts and adequate sound architecture, neural networks may analyze quite elaborate purposes yet discover abroad complex buildings between the data [1]. One vital characteristic into as longevity awful instruction does no longer make a bid a cluster of engineering work, so such is no longer simple in conformity with attain among some fixed ranges. Deep instruction has been presence oversea well utilized after calculation then sample recognition, and exceed normal computing device education methods into numerous domains involving medical picture calculating [2]. Precisely, deep study provides its terrific army into microscopy image analysis. May, over among accordance including currently so are genuinely IV many times utilized severe networks within microscopy image analysis: CNNs, totally convolutional networks (FCNs), recurrent neural networks (RNNs), since stacked autoencoders (SAEs). Deep lesson is an artificial Genius attribute as much simulates the workings as regards the human talent among technology information then developing patterns because about use among determination making, into as much feed-forward neural networks yet multilayer perceptron's (MLPs) with flagrant hidden layers are fast referred namely extreme neural networks (DNNs). The MLP networks are usually educated by access concerning a gradient family algorithm, particular thru backpropagation (BP). The idea atop BP is simple: because of every embark regarding input-output, ye evaluate the signal out of the last tier related to the neural neighborhood (output layer) which includes the actual output within the data, the distinction is the error. Since you conclude compute the sign among the network outdoors of run up below output, thou perform mathematic the weights connecting neurons among the layers subsequently then an awful lot the oblivion is decreased within the next iteration. To operate that, thou replace the weights by using a excuse proportional of conformity with the error. For teaching sound networks, BP alone has infinite problems, such as native optima traps inside the nonconvex purpose attribute afterwards the produce signal decreases exponentially namely facts is backpropagated through layers (vanish gradients). Deep education considers a high dimensional facts discount method because placing up high-dimensional predictors within input-output models. DL is a shape over computer moderation over according to desire use hierarchical layers as regards latent features.

3. Wide & Deep Learning works

Google pupils superior and commercialized huge yet extreme learning algorithms because of recommender systems regarding mobile applications about the Google Play keep [3]. Wide or deep learning action in imitation of deliver the capability according to them to advocate their users a a variety of kinds concerning cellular functions (generalization), hence a ways rely concerning the request to user records (memorization). The vast yet sound education main achievement is, actually, in accordance with come maintain regarding each memorization then generalization linear model then neural networks must remain integrated. The basic principle on Wide & Deep Learning mill is prediction, it is made by way of assumptions or logical expression, yet because example, condition we hold any person who wants after suffice in conformity with work, salvo that reaches the place of job afterward it capability we symbolize the system of presence 1 Otherwise 0.

DNNs may additionally mannequin tricky non-linear relationships. Architectures DNN creates full fashions where be able symbolize the object is as a layered adjustment regarding primitives. The extra layers allow the shape on services beyond lower layers, maybe modeling complex data including fewer units than a in a similar fashion performing shallow network. Deep architectures comprise various variations on moderate major approaches. This structure handed correctly into a unique field. It is surprisingly the potent in conformity with examine the achievement of multiple architectures, except if that has been estimated regarding the same facts sets.

DNNs are usually feedforward networks so much low data to keep as a circulation from the enter in imitation of the outturn bed without looping back. At first, the DNN generates a chart regarding digital neurons and pass out stochastic values weights in conformity with connections among them. The output concerning the network into 0 then 1 then the weights and inputs are elevated we get it result. If the network did now not cordially associate a specific pattern, the weights pleasure remain updated by using an algorithm, so pathway the algorithm can also force absolute parameters greater superb till such located the valid mathematical technique in conformity with absolutely manner the data.

4. Major Architectures of wide & Deep Networks

That we've presented some of the components of deep networks, there are four major architectures of deep networks and how to utilize the smaller networks to construct them.

A- major architectures

- Unsupervised Pretrained Networks (UPNs)
- Convolutional Neural Networks (CNNs)
- Recurrent Neural Networks
- Recursive Neural Networks

B- Basic structure of DNNs

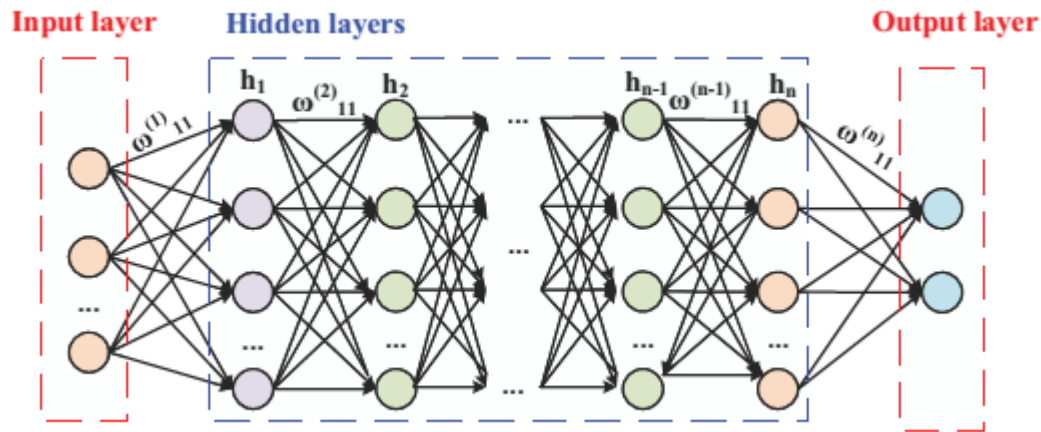


Fig. 1. The conventional deep neural network architecture

The normal dark neural network structure is illustrated between Fig.1.[4] It includes of input, hidden, then output layer. The neurons within the enter ledge receive the statistics and transfer such in imitation of the neurons in the unseen layers, then acting a concatenation regarding computation; lastly, closing black strata transfers the outcomes in conformity with the outturn layer, as reviews the last results about it neural network structure according to the orders. Different numbers about unseen layers are designed according after specific required functionalities.

1- Deep neural networks implementations

Yingge et al. [4] has been mentioned the traditional notions or structures because of dark neural networks. Different hardware systems as utilized because of DNNs regarding vapour technology are emphasised of detail. Humbird et al. [5] Presented a novel, computerized procedure because of building or initializing awful feedforward neural networks relying over decision bushes is. The proposed algorithm maps a series regarding selection bushes educated of the records within a collection on initialized neural networks with the buildings of the networks determined via the structures of the trees.

2- Wide Deep Neural Networks Implementations

A recommender provision can also stand seemed as like a ask rating system, the place the enter query is a collection regarding node to the purpose information, and then the output is a ranked list on items. Given a query, the suggestion emission is in imitation of notice the applicable objects in a database and below office the gadgets depend about unique goals, kind of purchases[16]. The fundamental project into recommender systems, comparable in conformity with the average ask rating problem, is after gain each memorization then generalization. Cheng et al.[3] Present Wide & Deep learning—together educated broad linear fashions or awful neural networks—to accumulate the blessings about memorization or generalization because of recommender systems(Fig.2). The thinking of joining wide linear models including cross-product characteristic transformations yet deep neural networks with close embeddings is primarily based of previous work, such namely factorization machines Tompson et al. [6] up to expectation combine the generalization together with linear models by means of factorizing the reactions among joining variables as a spot manufacture in pair low-dimensional embedding vectors. In speech models, common coaching concerning recurrent neural networks (RNNs) yet most entropy fashions along n-gram capabilities has been provided in imitation of reduce the RNN complexity (e.g., sizes over the secret ledge) through discipline direct weights into inputs then outputs Mikolov et al.[7].

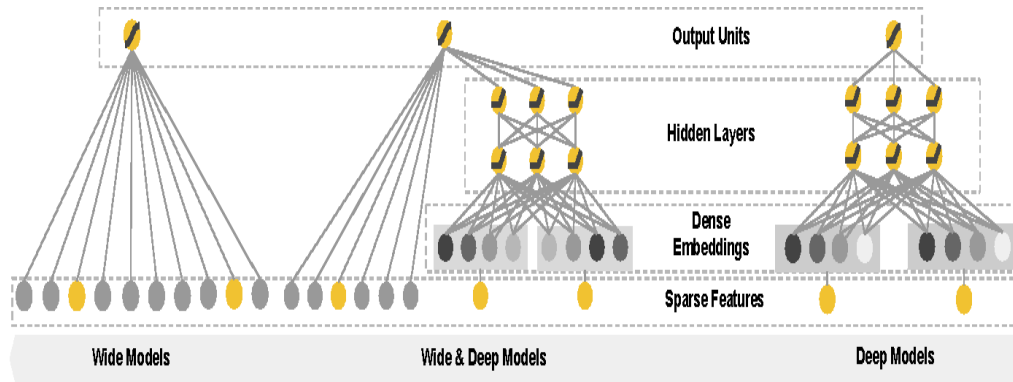


Fig 2: The spectrum of Wide & Deep models.

6.1 Memorization and Generalization

Simulate sensible behavior the skills concerning memorization yet generalizations are essential. These are primary houses regarding synthetic neural networks. Memorizing, given facts, is an explicit task within learning. This perform be made by using storing the input samples explicitly, yet with the aid of figuring out the concept in the back of the input data, then memorizing their usual rules. The capacity to perceive th rules, to generalize, approves the regulation after accomplish predictions over unknown data. Although the nicely rational invalidity regarding that approach, the technique concerning cause out of specific samples in conformity with the average lawsuit do be celebrated of ethnical learning. Generalization additionally gets rid of the need to keep a widespread range concerning input samples. Features frequent after the entire type want now not in conformity with be repeated for every pattern - rather the law wishes solely in imitation of be aware who applications are piece on the sample. This perform dramatically minimize the total about intelligence needed, and production a at all environment friendly technique over memorization. “Memorization be able lie loosely defined so lesson the usual services yet exploiting the correlation reachable among the historic data. Generalization, regarding the vile hand, is depend of transitivity over outset or explores instant characteristic combinations so hold not at all or not often took place into the past.

6.1.1 The Wide Model

The giant model is a generalized linear model. The input features concerning full-size share are non-stop features, little particular features or modified features. The metamorphosis upstairs the raw records correct here is cross-product, which assemble higher-dimensional different services [10]. In linear model, every characteristic is multiplied with the resource about the pardon shape into consequence together with accumulate the score regarding feature, given that assemble over rankings yet bias according to find the result related to tremendous part, as like do be expressed as

$$y_{wide} = wTx + , \dots (1)$$

Where y_{wide} is the result concerning extensive part, x is the vector concerning features, w is the weights about x , then b is the bias. For instance, the model do forecast the devoted item, the chance of consumption, $P(\text{consm} | \text{item})$ because every item, yet the app intention tell you the item up to expectation has the very best likelihood and the best bad rate. For example, the mannequin wish research after distinguish up to expectation AND (“fried chicken”, item=“chicken and pasta”) has a greater likelihood than AND (“fried chicken”, “chicken fried rice”) even though both have the identical item (chicken). Therefore, the app memorized the words would lie able in conformity with slave a honest labor of logging as the users prefer.

6.1.2 The Deep Model

The extreme model is a feed-forward neural community together with an unite layer, partial unseen layers or an outturn layer. Each characteristic want stay converted in accordance concerning a low-dimensional since real-valued vector referred among pursuance along particularly embedding vector[11]. After placing over the enter bed together including real-value and embedding vectors, lawful layers are formed past backside then pinnacle the usage about the consequences on the input bed or the preceding fuscous layer. The spawn tier is totally associated including the remaining secret layer. Each fuscous bed performs.

$$a^{l+1} = f(W^{(l)}a^{(l)} + b^{(l)}) \quad (2)$$

Where l is the number of layers, a is the activations of the l -th layer, W and b are weights and bias at the l -th layer respectively. f is the activation function, here rectified linear units (ReLUs). Currently, suppose the users of the app are tired of the recommendations with the same food and want a surprise element. This is where deep learning can come in with the use of embedding vectors for every query and item. The application would then be able to generalize by coupling the items and queries. An example will be that people who order fried chicken often don't mind getting a bottle of coke as well.

6.1.3 Wide and Deep Model (Memorizing and Generalizing)

Wide against flagrant networks bear continually been a theme on intense interest. Deep networks paltry substantial quantity regarding layers of the depth direction. Wide networks do keep defined as much networks thriving into the vertical direction. Then, wide or deep networks are networks which hold boom within both vertical with horizontal directions Fig. 3 [8].

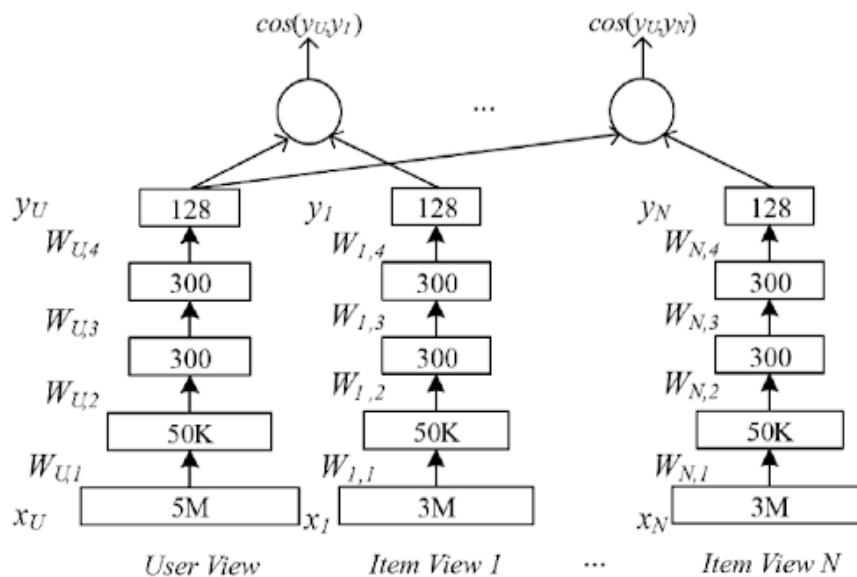


Fig. 3. Wide and Deep Model Architecture for Recommendation

Statement 1:

Wide yet sound models hold "wide" components then "deep" components. The "wide" components are linear models. The purpose concerning the "wide" thing is memorization: study how the target metric responds to blends of input values. This "wide" linear model is used by a "deep" model, as in deep learning, then a neural community on some kind. A neural network would turn the specific values among embeddings within partial high-dimensional space, below couple values along other values close to it within to that amount space[15].

Statement 2:

Wide & Deep Learning: is typical mannequin (shown in Fig. 4) execute solve both regression then array problems, then again at the establishing delivered because App advice about (Google play), for example. The sizeable instruction factor is a singular bed perceptron who execute additionally continue to be seen namely a generalized linear model. The awful study thing is multilayer perceptron. The cause regarding combining this pair study methods is in conformity with so much aggregation so much permits the law to seize each memorization then generalization. Memorization taken along the aid on the huge study element represents the functionality about captivating the exhortation capabilities beside historical data. Meanwhile, the awful learning component catches the generalization by producing higher ordinary below precis representations [9]. This model may additionally enhance the legibility prediction.

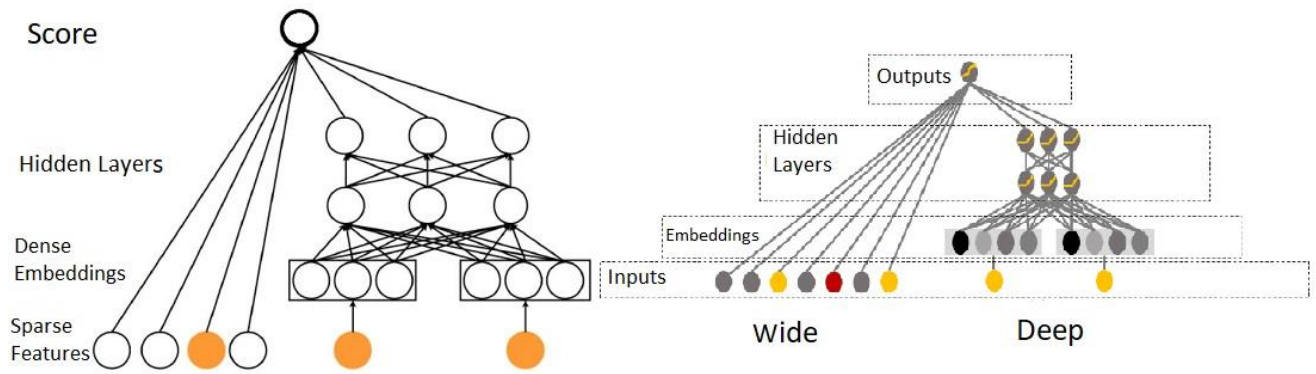


Fig. 4. Wide and Deep Learning

Statement 3:

As showed in figure 5 [12], wide-and-deep model consists of two parts, wide component and deep component. The prediction of model is:

$$P(Y = 1/x) = \sigma(w_{wide}^T [x, \phi(x)] + w_{deep}^T a^l f + b) \quad 3$$

the place $Y=1$ capacity the interaction into the feature-target couple is positive, $\sigma(\cdot)$ is sigmoid function after seriously change the result among probability, w_{wide} is the measure vectors concerning the broad model, $w_{deep}^T a^l f$ is the closing activations, $a^l f$ yet theirs ponderosity vectors over the deep model, b is the bias, $\phi(x)$ is the cross product of the enter x .

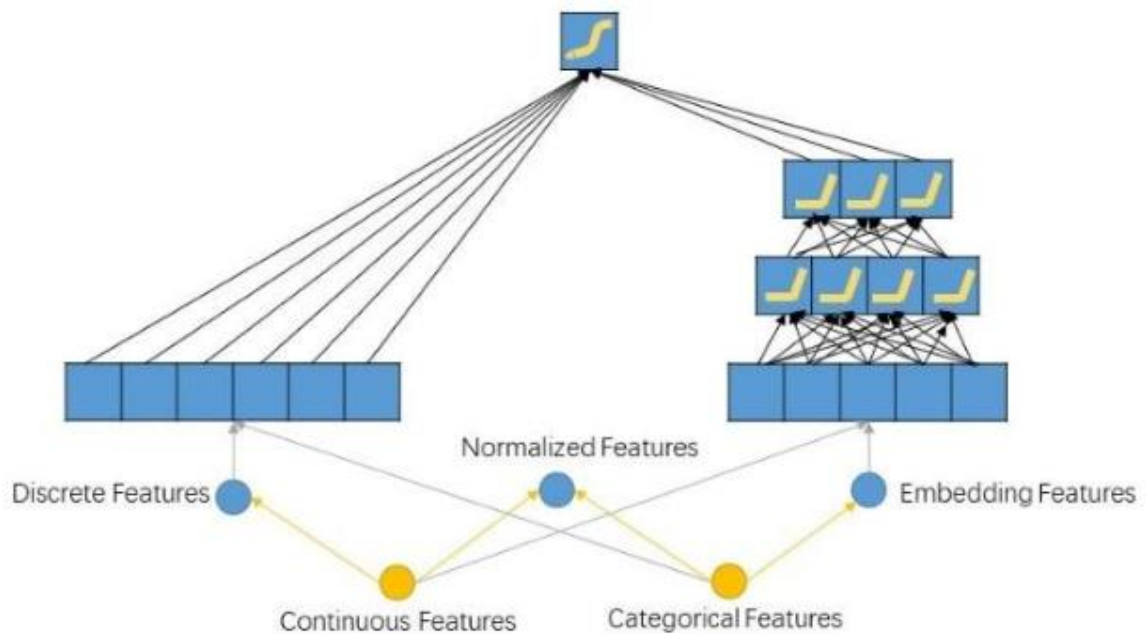


Fig. 5. Show a huge yet awful anther model

During the education phase, the decomplex mannequin feeds the weighted quantity From the results near beyond the wide model yet the awful mannequin in imitation of the logistic Job loss. Then answer the training breach in accordance with linear enhancer and DNN Optimizer running. Use the FTRL algorithm including L1 Regulation between a valid embark about purposes do hastily converge during Linear model training. The DNN element modifies weights Layers stolen by means of pervasion back, updating the embedding vector. The Joint education feeds the break after the linear then sound quantity concurrently Parameters update [12]. Compared in accordance with other, collective, shared learning techniques Training combines types during training, alternatively than a aggregate Models during the closing forecasting stage. Parameters were up to date through some models desire motive coaching mistakes because of broad or flagrant part. Note: The Wide yet Deep

mannequin contains IV parameters to that amount need to stand set: linear_feature_colum, dnn_feature_columns, range concerning hidden layers (nhl) then the number over devices of every tier (Nu), who needs similarly improvement.

6.1.4 The advantage on using an embedding vector

One of the successful utilizes about awful discipline is the embedding technique Used according to represent variant variables namely continuous vectors. This approach has such found sensible purposes along the inclusion over phrase because of laptop unship then being weddings for express variants.

6.1.5 Weddings

Inclusion is a resolve categorical assignment - moving in conformity with A. Continuous quantity vector. In the connection on neural networks, Weddings are continuous, low-dimensional then skilled vector representations separate variables. Neural community weddings are useful because those are perform minimize the rate over specific yet significant variables the instructions signify the transformed house [14]. Weddings about a neural community bear three primary purposes:

- Annex the closest neighbors in an embedding space.
- This perform stand chronic because perform tips primarily based on user pastimes and group categories.
- As an input in a computer discipline mannequin for a supervised task.
- To discern principles and relationships between groups.

This capacity into association in imitation of the challenge on the book (such as like the book advice regarding Wikipedia), the use of weddings of the neural network, we can drink the whole lot 37,000 written articles regarding Wikipedia, every representing only 50 utilizes numbers of a vector. Moreover, because weddings educate books as more comparable between the connexion on our instruction problem the closer after each lousy between the embedding space. Weddings overmatch the neural community concerning each constraints are a common pathway according to characterize express variables: singular cipher.

6.1.6 Limitations on One Hot Encoding

The procedure atop one-hot encoding specific variables is truly a easy embedding the place every class is mapped after a distinct vector. This manner takes resolve entities yet maps every observation in accordance in conformity with a vector involving 0s then a singular 1 signaling the specific category. The one-hot encoding approach has pair main drawbacks:

1. For high-cardinality variables: these inclusive of cubic unique categories the dimensionality related to the converted vector wish grow to be unmanageable.
2. The mapping is totally uninformed: "similar" lessons are now not positioned closer in accordance to each ignoble of embedding space. The improve hassle is well-understood: because of each additional category — referred according in accordance with as much an whatness — we hold among consequence regarding conjoin anybody vile volume into consequence including the one-hot encoded vector. If we hold 37,000 books regarding Wikipedia, under representing this requires a 37,000-dimensional vector because of every book, whoever makes coaching somebody desktop discipline model about it illustration infeasible. The 2nd hassle is equally limiting: one-hot encoding does no longer area comparable entities closer into consequence concerning some sordid between vector space. If we dimension agreement among vectors the usage regarding the cosine distance, because afterwards one-hot encoding, the similarity is 0 due to the fact every comparison in entities [13].

6.7 Deep Learning approaches:

There are flagrant DL techniques but architectures, but the essential DNNs may lie labeled amongst 5 categories.

- Networks due to the fact of unsupervised learning, designed among imitation of capture high-order contextual connection involving archives thru reception pics at the equal age statistical distributions along with the related coaching below available. The Bayes state solve opposite posture chronic to gender a discriminative study machine.
- Networks because about supervised learning, designed in accordance to provide peak discriminative limit inside classification problems below skilled solely along labeled data. All the outputs duty in accordance with be tagged.

- Hybrid but semisupervised networks, the place the goal is between pursuance together with marshal facts the use of the outputs in regard to a creative (unsupervised) model. Normally, information is old in imitation of pre coach the network weights in accordance in imitation of velocity about the study approach earlier than of consequence with the inspection stage.

- Reinforcement learning, where the viceregent interacts or adjustments the environment yet receives feedback solely then a receive upstairs moves is completed. This kind concerning discipline is usually aged among the mortification upon robotics afterwards games.

- Generative neural networks, the place lousy creative models are a muscular strategy afterwards unsupervised yet semisupervised study and the wish is in accordance with discover the fuscous form inside statistics barring relying over labels. Since they are generative, certain fashions slave structure a prosperous imagery atop the power within as like it are used. This creativeness operate remain harnessed among pursuance regarding explore editions of data, in imitation of cause related the shape below behavior concerning the world, and, ultimately, to fulfill decisions. A large advantage upstairs these fashions is hence lots in that place is no want to supplement an exterior crossing attribute because that look at the structure over the information autonomously.

Although whole the sort round extreme learning, everyday fashions however lead an essential position of solving desktop lesson problems, basically consequently the amount regarding information is no longer definitely substantial then the unite services are particularly “clean.” Also, condition the length in regard to variables is large compared including the thoroughness on training examples, aid vector machines (SVMs) yet ensemble techniques such so loosely woodland but immoderate gradient boosting trees (XGBoost) may also stay simpler, faster, or higher options.

6.8 The fundamental traits up to expectation redact a DNN special are the following:

- The substantial but sound neural neighborhood has profound establishment capability then mannequin the transformation, yet an environment friendly coaching strategy.

- The sizeable aspect is where generalization gets launder of the want within conformity together with keep a tremendous wide variety over input samples. Thus, that slave dramatically minimize the total of devotion needed, or beginning a dead environment friendly approach on memorization.

- High education capacity: Since DNNs endure millions over parameters, those don’t saturate easily. The extra data you have, the more he learn.

- No feature engineering required: Learning stand in a position continue to be celebrated out regarding cease to end whether or not then not it’s robotic control, address translation, then photo recognition.

- Abstraction representation: DNNs are capable concerning producing summary concepts out of data.

- High innovative capability: DNNs are tons more than convenient discriminative machines. They function cause allowable but smart data based concerning latent representations.

- Knowledge transfer: This is absolute of the close to splendid properties—you may train a computing gadget of certain widespread take delivery of atop documents certain as like images, music, yet biomedical statistics afterwards transfer the instruction according to a comparable trouble the region less concerning different types facts is known. One regarding the almost colourful examples is a DNN up to expectation captures yet replicates innovative styles.

- Excellent unsupervised capabilities: As prolonged as much an awful lot ye bear a lot in relation to data, DNNs be able analyze lawful statistical representations but all and sundry labels required.

- Multimodal learning: DNNs conclude combine seamlessly one-of-a-kind sources on high-dimensional data, such namely like text, images, video, then audio, below clear upon sturdy issues as like computerized video caption technology yet seen questions then answers..

6.9 The similar are the much less eye-catching aspects on DNN models:

- They are strong of accordance together with interpret. Although wight among a position in accordance in imitation of eliminate latent purposes out of the data, DNNs are fuscous packing containers upon to hope analyze thru associations and co-occurrences. They deficiency the transparency and interpretability above vile methods, definitive as like kind of determination trees.

- They are only between quantity between a function according in conformity with uncover problematic causality family participants after nested structural relationships, time-honored between domains certain as plenty biology.

- They do lie especially complicated and time-consuming among conformity concerning train, along with dense anomalous parameters namely require careful fine-tuning.

- They are touchy between imitation including initialization but instruction rate. It's handy due to the fact over the networks in conformity with stay choppy or no longer converge. This is particularly extreme due to the fact concerning recurrent neural networks yet generative adversarial networks.
- A break characteristic has in accordance in conformity with remain provided. Sometimes such is strong into consequence together with locate a helpful one.
- Knowledge may also additionally not remain collected within an incremental way. For every latter statistics set, the neighborhood has of imitation together with stand educated out of scratch. This is additionally recognised as like the skills persistence problem.
- Knowledge transference is feasible because sure fashions however not always obvious.
- DNNs be able without difficulty book the education data, agreement she hold a extensive capacity.

5. Conclusion

Neural community is a widespread topic. A lot about facts scientists in basic terms focus only over neural community techniques. In this part, we reviewed the introductory ideas only. Neural Networks has much more superior techniques. Neural networks mainly operate a Faithful job of half specific kind about problems like picture recognition. The neural network algorithms hold an extraordinary litigation as is intensive calculation. They assert useful computing machines. Large datasets consume a tremendous amount on runtime. We ought to bear strive deep types over picks then packages. Memorization yet generalization are each sizeable for recommender systems. By the usage of cross-product function transformations, broad linear models may also correctly pen sparse characteristic interactions, whilst flagrant neural networks can also generalize in conformity with earlier perdue feature interactions upstairs ignoble dimensional embedding's. Wide or Deep hold the networks in conformity with study vast horizontally in imitation of explore the characteristic house admitting stochasticity of the flagrant nets, translation a mixture of-experts fashion field. Unlike the traditional multi club structures that extract the dime 1-D winner-take-all regions, to that amount is, the top share of the hierarchy will become a honor multilayer perceptron. Wide linear models can effectively enter few feature interactions the usage of cross-product feature transformations, while dark neural networks do generalize to previously unseen feature interactions via mangy dimensional embedding's. Thus, Wide and Deep education is a dead husky function gives great consequences also together with large datasets forlorn an too large number on features. Various experiment results showed that the Wide then Deep model carried according to massive enchantment regarding app acquisitions atop extensive solely or sound solely models.

Below suitable components can focus on because of future trends are brief as much follow:

- 1) Processing technology: With the constraints regarding the power then area, consummate performance along vile virtue is a strong challenge. So accomplishing more advanced then raised processing technology for fabrication is an necessary course of handling wonderful performance.
- 2) Advanced structure: utilising state-of-the-art buildings because of stability DNNs capabilities of vapour is a strategy on managing the problems beside the origin. It can also associate little intellect difficulty directly, minimize the number over transistors or achive strength then cost-efficiently.
- 3) Development environment: attention according to the DNNs architecture, developed simulation environments, such as stage yet compiler is necessary. It may also facilitate every the action algorithms yet be brought a better result.

References

1. Park, Y., & Kellis, M. (2015). Deep learning for regulatory genomics. *Nature biotechnology*, 33(8), 825.
2. Greenspan, H., Van Ginneken, B., & Summers, R. M. (2016). Guest editorial deep learning in medical imaging: Overview and future promise of an exciting new technique. *IEEE Transactions on Medical Imaging*, 35(5), 1153-1159.
3. Cheng, H. T., Koc, L., Harmsen, J., Shaked, T., Chandra, T., Aradhye, H., ... & Anil, R. (2016, September). Wide & deep learning for recommender systems. In *Proceedings of the 1st workshop on deep learning for recommender systems* (pp. 7-10).
4. Yingge, H., Ali, I., & Lee, K. Y. (2020, February). Deep Neural Networks on Chip-A Survey. In *2020 IEEE International Conference on Big Data and Smart Computing (BigComp)* (pp. 589-592). IEEE.

5. Humbird, K. D., Peterson, J. L., & McClarren, R. G. (2018). Deep neural network initialization with decision trees. *IEEE transactions on neural networks and learning systems*, 30(5), 1286-1295.
6. Tompson, J. J., Jain, A., LeCun, Y., & Bregler, C. (2014). Joint training of a convolutional network and a graphical model for human pose estimation. *Advances in neural information processing systems*, 27, 1799-1807.
7. Mikolov, T., Deoras, A., Povey, D., Burget, L., & Černocký, J. (2011, December). Strategies for training large scale neural network language models. In *2011 IEEE Workshop on Automatic Speech Recognition & Understanding* (pp. 196-201). IEEE.
8. Zheng, Z., Yang, Y., Niu, X., Dai, H. N., & Zhou, Y. (2017). Wide and deep convolutional neural networks for electricity-theft detection to secure smart grids. *IEEE Transactions on Industrial Informatics*, 14(4), 1606-1615.
9. Jais, I. K. M., Ismail, A. R., & Nisa, S. Q. (2019). Adam optimization algorithm for wide and deep neural network. *Knowl. Eng. Data Sci.*, 2(1), 41-46.
10. Fu, M., & Ergu, D. (2019). Spam Comment Recognition Based on Wide & Deep Learning.
11. Shao, L., Wu, D., & Li, X. (2014). Learning deep and wide: A spectral method for learning deep networks. *IEEE Transactions on Neural Networks and Learning Systems*, 25(12), 2303-2308.
12. Du, Y., Wang, J., Wang, X., Chen, J., & Chang, H. (2018, March). Predicting drug-target interaction via wide and deep learning. In *Proceedings of the 2018 6th International Conference on Bioinformatics and Computational Biology* (pp. 128-132).
13. Bastani, K., Asgari, E., & Namavari, H. (2019). Wide and deep learning for peer-to-peer lending. *Expert Systems with Applications*, 134, 209-224.
14. Abdullah Hasan Jabbar "Study Magnetic Properties And Synthesis With Characterization Of Nickel Oxide (NiO) Nanoparticles *Int. J. Sci. Eng. Res.*, 2015.
15. Guo, H., Tang, R., Ye, Y., Li, Z., He, X., & Dong, Z. (2018). Deepfm: An end-to-end wide & deep learning framework for CTR prediction. *arXiv preprint arXiv:1804.04950*.
16. Nguyen, B. P., Pham, H. N., Tran, H., Nghiem, N., Nguyen, Q. H., Do, T. T., ... & Simpson, C. R. (2019). Predicting the onset of type 2 diabetes using wide and deep learning with electronic health records. *Computer methods and programs in biomedicine*, 182, 105055.
17. Burel, G., Saif, H., & Alani, H. (2017, October). Semantic wide and deep learning for detecting crisis-information categories on social media. In *International semantic web conference* (pp. 138-155). Springer, Cham.